FORM PTO-1390 (Modified) (REV 11-98) U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371	112740-327
	U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR **09/937022**

INTERNATIONAL APPLICATION NO. **PCT/DE00/00859**	INTERNATIONAL FILING DATE **March 20, 2000**	PRIORITY DATE CLAIMED **March 3, 1999; July 23, 1999**

TITLE OF INVENTION
METHOD AND DEVICE FOR RECORDING AND PROCESSING AUDIO SIGNALS IN AN ENVIRONMENT FILLED WITH ACOUSTIC NOISE

APPLICANT(S) FOR DO/EO/US
AUBAUER, Dr. Roland, et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.

2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.

3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).

4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.

5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))

    a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).

    b. ☐ has been transmitted by the International Bureau.

    c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).

6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).

7. ☒ A copy of the International Search Report (PCT/ISA/210).

8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))

    a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau).

    b. ☐ have been transmitted by the International Bureau.

    c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.

    d. ☐ have not been made and will not be made.

9. ☒ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).

10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).

11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).

12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.

14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.

15. ☒ A **FIRST** preliminary amendment.

16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.

17. ☒ A substitute specification.

18. ☐ A change of power of attorney and/or address letter.

19. ☒ Certificate of Mailing by Express Mail

20. ☒ Other items or information:

> **Informal Drawings (7 sheets, Figures 1-8)**
> **Unsigned Declaration and Power of Attorney**

PCTUS1/REV03

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER
09/937022	PCT/DE00/00859	112740-327

21. The following fees are submitted:.

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

		CALCULATIONS PTO USE ONLY
☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2) paid to USPTO and International Search Report not prepared by the EPO or JPO	$1,000.00	
☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but Internation Search Report prepared by the EPO or JPO	$860.00	
☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO	$710.00	
☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4)	$690.00	
☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4)	$100.00	

ENTER APPROPRIATE BASIC FEE AMOUNT = $860.00

Surcharge of $130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)). **$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	35 - 20 =	15	x $18.00	$270.00	
Independent claims	5 - 3 =	2	x $80.00	$160.00	
Multiple Dependent Claims (check if applicable).			☐	$0.00	

TOTAL OF ABOVE CALCULATIONS = $1,290.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐ **$0.00**

SUBTOTAL = $1,290.00

Processing fee of $130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). + **$0.00**

TOTAL NATIONAL FEE = $1,290.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐ **$0.00**

TOTAL FEES ENCLOSED = $1,290.00

Amount to be: refunded	$
charged	$

☒ A check in the amount of **$1,290.00** to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. in the amount of to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **02-1818** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Michael S. Leonard (Reg. No. 37,557)
Bell, Boyd & Lloyd LLC
P.O. Box 1135
Chicago, Illinois 60690-1135
Tel: 312 807-4270
Fax: 312 372-2098

SIGNATURE

Michael S. Leonard
NAME

37,557
REGISTRATION NUMBER

September 19, 2001
DATE

IN THE UNITED STATES ELECTED/DESIGNATED OFFICE

OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

UNDER THE PATENT COOPERATION TREATY-CHAPTER II

5

PRELIMINARY AMENDMENT

APPLICANTS: Aubauer, Dr. R., et al.   DOCKET NO: 112740-327

SERIAL NO: GROUP ART UNIT:

10   EXAMINER:

INTERNATIONAL APPLICATION NO: PCT/DE00/00859

INTERNATIONAL FILING DATE: ·   March 20, 2000

INVENTION: METHOD AND DEVICE FOR RECORDING AND
                  PROCESSING AUDIO SIGNALS IN AN ENVIRONMENT
15   FILLED WITH ACOUSTIC NOISE

Box PCT
Assistant Commissioner for Patents,
Washington, D.C. 20231

20   Sir:

Please amend the above-identified International Application before entry into the

National stage before the U.S. Patent and Trademark Office under 35 U.S.C. §371 as

follows:

In the Specification:

25   Please replace the Specification of the present application, including the Abstract,

with the following Substitute Specification:

SPECIFICATION

TITLE OF THE INVENTION

METHOD AND DEVICE FOR RECORDING AND PROCESSING

30   AUDIO SIGNALS IN AN ENVIRONMENT FILLED WITH ACOUSTIC NOISE

BACKGROUND OF THE INVENTION

Previous methods and devices for recording and processing audio signals (for

example speech and/or sound signals) in an environment filled with acoustic noise are

based either on the use of a first-order directional microphone (gradient microphones) or

35   on a microphone array having two or more individual microphones (for example ball

404846/D/2 CBBX02_

microphones). In the latter case, additional digital filters are used to match the frequency responses of the microphones.

Both directional microphones and microphone arrays are covered by the generic term free-field microphones, whose directivity allows the useful sound and the acoustic

5   noise to be separated, and whose output signals are added using the "delay and sum principle".

Microphone arrays are arrangements of a number of microphones positioned physically separately, whose signals are processed such that the sensitivity of the overall arrangement is directional. The directivity results from the propagation time differences

10   (phase relationships) with which a sound signal arrives at the various microphones in the array. Examples of this are so-called gradient microphones or microphone arrays which operate on the delay and sum beam-former principle. A problem that arises in the practical implementation of microphone arrays is the scatter, resulting from production tolerances, in the sensitivity and frequency response of the individual microphones used.

15   The sensitivity in this case means the characteristic of a microphone to produce an electrical signal from a predetermined sound pressure level. The frequency response represents the way in which the sensitivity of the microphone varies with frequency. The tolerance band stated by the microphone manufacturers is typically between ± 2 and ± 4 dB. If these microphone characteristics differ within a microphone array, then this has a

20   negative influence on the frequency response and the directional characteristic of the overall arrangement. As a rule, the frequency response has increased ripple, while the directivity is considerably reduced. In this context, Table 1 shows the reduction in the directivity index of a second-order gradient microphone (microphone array comprising two individual cardioid microphones) when the two individual microphones have different

25   sensitivities. The directivity index in this case indicates the suppression of diffused incident sound compared to useful sound from the microphone major axis.

Until now, the sensitivity and the frequency response of the individual microphones in an array have had to be determined by acoustic measurement and have had to be matched to one another by suitable electrical amplifiers and filters. The

30   measurement includes the stimulation of the microphone to be measured using a sound reference signal produced via a loudspeaker, and the recording of the electrical signals

produced by the microphones. The gain factors and filter parameters required for matching are then calculated from the microphone signals, and set as appropriate.

The acoustic measurement of the microphone parameters involves considerable technical complexity and results in corresponding costs for the production of microphone arrays. Furthermore, the trimming process is carried out during the production of the microphone array, so that it is applicable only to this one operating situation. Other operating situations, for example different supply voltages or aging effects of the microphones, are ignored.

A gradient microphone system is known from US-5,463,694, which is based on the idea that microphones essentially have the same frequency response and the same sensitivity. The term "sensitivity" means the characteristic of a microphone to produce a predetermined electrical signal from a predetermined sound pressure level.

SUMMARY OF THE INVENTION

An advantage of the present invention is to record and to process audio signals with a good useful-signal to noise-signal ratio in acoustic noise conditions and with a good ratio between the direct sound and the reflected sound in an environment which in particular has no reverberation.

According to the invention, there is processing of electrical signals produced by conversion of audio signals recorded by a predetermined microphone arrangement in such a manner that, if the sound pressure levels at the microphones in the microphone arrangement are the same, electrical signals which are produced by these microphones but are of different intensity - different sensitivities of the microphones - are automatically matched, that is, without any manual matching procedures needing to be carried out individually and separately.

The invention, in this case, pertains to combining the characteristics of an array of microphones with those of a method for matching the sensitivity of microphones.

Advantages of this procedure involve simple implementation in conjunction with the (optimum) result achieved in the process and, a good relationship between the complexity of the microphone arrangement (arrays) and the result.

The result which can be achieved using the present invention is considerably better than the result which can be achieved by using US Patent 5,463,694. This is shown in the following table:

The table shows the relationship between the "difference between the sensitivity of the microphones (delta)" and the "directivity index"

Delta (dB)	Directivity index (dB)
0	8.7
1	8.4
2	8.1
3	7.8
4	7.5
5	7.2
6	6.9

5   Summary: The greater the difference between the sensitivity of the microphones, the poorer is the directivity index.

The method and the device of the invention allow an optimum directivity index to be achieved for the microphone arrangement for any environment filled with acoustic noise, since it always automatically matches the sensitivity of the microphones.

10   One parameter for assessing a directional microphone is the directivity index. The directivity index means the extent to which diffuse (omnidirectional) incident sound is suppressed in comparison to useful sound from the major axis. In this case, the directivity index is a logarithmic variable, and is therefore expressed in decibels.

The present invention preferably comprises an array of microphones and filters in 15 order to match the sensitivity of the microphones and to achieve the desired array frequency response.

In comparison to known microphone arrays, which require complicated digital filters in order to match the frequency responses of the microphones, the inventive method and device require only the sensitivity to be matched. Furthermore, this can be achieved 20 either by a simple digital filter, or by an analog circuit.

With the inventive array, in which two simple directional microphones are used, directivity indexes are achieved which cannot be achieved with a single directional microphone. An array of ball microphones can achieve this result, but only by using more than two microphones to form the array. Furthermore, preferably, a filter is required for 25 each microphone in order to match the frequency responses of the various microphones.

In order to match the sensitivity of the microphones, the microphones should be stimulated using a sound preferably source which is arranged at right angles to the axis of

the microphones, in order to calculate the sensitivity correction. However, this is not always feasible in practice.

Alternatively, it is also possible to match the sensitivity independently of the position of the sound source. For example, when the sound source has only low-frequency
5   components whose wavelengths are much longer than the distance between the microphones. In a microphone arrangement having two microphones, the wavelength should, for example, be greater than twice the distance between the microphones, while the wavelength for a microphone arrangement having more than two microphones should be greater than the sum of the distances between the individual microphones.

10   Furthermore, the microphones are preferably positioned in pairs such that their major axes lie on a common axis. However, deviations from this are also possible with regard to a tilt or adjustment angle, which can vary, for example, in the range between 0° and 40°, and with respect to an offset distance which, for example, is less than or equal to the distance between the microphones. In all these different situations, there is preferably
15   one reference microphone with a reference major axis with respect to which each of the other microphones in the microphone arrangement is arranged at an adjustment angle to the major axis and at an offset distance from it.

The signals from the microphones are processed, for example, by a block in order to match the sensitivity of the microphones. The sum and the difference are then formed
20   from the two signals, and combined to form a linear combination in order to obtain a signal with a higher-order directional characteristic than that of the two microphones in the array.

The signal is then processed using a filter in order to achieve the desired array frequency response and sensitivity.

25   Furthermore, it is advantageous if the microphone arrangement is a second-order gradient microphone (quadrupole microphone) arranged on an "acoustic boundary surface since this improves the ratio between the signal and the self-noise. In acoustics, an "acoustic boundary surface" is a hard surface, for example a table in a room, a window pane or the roof in a car etc. In this case, the ratio between the useful signal and the
30   environmental noise is furthermore increased when sound is recorded in situations with high environmental noise, for example in vehicles or in public spaces. The subjective comprehensibility of recorded speech is thus improved in an environment with

reverberation, for example in spaces with highly reflective walls (car, telephone cubicle, church, etc.).

The quadrupole microphone consists of a combination of two first-order gradient microphones with a cardioid characteristic, whose output signals are subtracted from one another. This measure increases the directivity index from 4.8 to 10 dB. The directivity index in this case indicates the gain with which the useful signal incident on the microphone major axis is amplified in comparison to the diffuse incident noise signal. Suitable arrangement of the individual microphones in the quadrupole microphone on a boundary surface improves the useful signal sensitivity of the microphone by a further 6 dB, and significantly improves the useful signal to self-noise ratio of higher-order gradient microphones, which is in principle low in the lower frequency range.

A significant advantage of the present invention is that the complexity involved in achieving improved useful signals is small in comparison to that of previous solutions. At the same time, the external dimensions of the boundary surface quadrupole microphone are less than with known arrangements of comparable directivity. The proposed arrangement avoids interference between the incident direct sound and the sound which is reflected by the boundary surface and can interfere with the directivity of a microphone close to a boundary surface.

The boundary-surface construction of the gradient microphone raises the microphone useful signal incident on the major axis by 6 dB with respect to the microphone self-noise.

Higher-order gradient microphones constructed with a boundary surface can be used sensibly wherever high-quality recording of acoustic signals is required in a noisy environment. In addition to high noise signal suppression, the high directivity of the microphone also achieves considerable suppression of reverberation in rooms, so that this considerably improves the capability to understand speech, even in quiet rooms. Examples for the use of the proposed invention include hands-free devices for telephones and automatic voice recognition systems, as well as conference microphones.

Additional features and advantages of the present invention are described in, and will be apparent from, the Detailed Description of the Preferred Embodiments and the Drawings.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 is a schematic diagram of a microphone array according to the present invention.

Figure 2 is a schematic diagram of another microphone array according to the present invention.

Figure 3 is a schematic diagram of an automatic microphone sensitivity trimming for n microphones in an array.

Figure 4 is a schematic diagram of an automatic microphone sensitivity trimming for two microphones, with the signal levels of both microphones being regulated.

Figure 5 is a schematic diagram showing a trimming process according to the present invention.

Figure 6 is a schematic diagram of a trimming apparatus according to the present invention.

Figure 7 is a circuit diagram for sensitivity and frequency response control of microphones according to the invention.

Figure 8 is another circuit diagram for sensitivity and frequency response control of microphones according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The way in which the sensitivity trimming is carried out is shown in Figures 1 and 2. If the two microphones have approximately the same frequency response, sensitivity trimming in a restricted frequency range is sufficient to achieve the desired directivity over the entire transmission band. In practical situations, the condition of "equal frequency response" is satisfied to a good approximation.

The filter illustrated in Figure 2 may advantageously be in the form of a low-pass filter with a cut-off frequency of, for example, 100 Hz.

The possible applications for a second-order gradient microphone include all situations where good speech transmission is required in noisy surroundings. For example, this may be a microphone for a hands-free system in a car, or the microphone for a voice recognition system operating in the hands-free mode.

Automatic trimming of microphone sensitivity

The present invention can address the problem of microphone sensitivity trimming by automatic trimming of the microphone signal levels during operation of the microphones in an array. In this case, the existing environmental noise level or useful

5   signal level is sufficient. The microphone signal levels and amplitudes recorded by the microphones are measured and are matched to one another independently of their respective phases. In this case, it must be assumed that the sound pressure levels arriving at the microphones are virtually the same, or that the discrepancies are considerably less than the microphone sensitivity tolerance. This condition is satisfied when the distance

10   between the sound source which dominates the sound level and the microphone array is considerably greater than the distance between the microphones to be trimmed, and no pronounced space modes occur. The signal levels can be measured by any type of envelope curve measurement or by real root-mean-square value measurement. The time constant for this measurement must in this case be longer than the maximum signal

15   propagation time between the microphones to be trimmed. The sensitivity trimming can be carried out by amplification or attenuation in the opposite sense to the discrepancy between the signal levels.

Figure 3 shows the block diagram of the automatic microphone sensitivity trimming for n microphones in an array. Microphone 1 is in this case the reference

20   microphone, to whose microphone signal level the levels of the other microphones 2 to n are matched. The circuit diagram is composed of blocks whose gain or attenuation is controllable and units for signal level measurement. The measured signal levels are used to produce difference or error signals e_n, which are used as the control variable for the variable amplifiers or attenuators. Overall, there are n-1 regulators, whose reference

25   variable is the signal level of the reference microphone. In order to satisfy the distance condition mentioned in the previous paragraph, adjacent microphones can also be trimmed in pairs (not shown in Figure 3).

Figure 4 shows the block diagram of the automatic microphone sensitivity trimming for two microphones, with the signal levels of both microphones being

30   regulated. The advantage of this embodiment over an embodiment with an unregulated reference microphone as shown in Figure 3 is that there is less variance between the output levels, since it is possible to use the mean sensitivity of the microphones for regulation.

The automatic microphone trimming proposed here can be implemented easily in terms of circuitry and requires no further trimming steps, such as complex acoustic trimming. This results in clear cost advantages even for small microphone array quantities. Furthermore, the method allows continuous trimming, so that it is also possible

5   to take account of changes in the microphone sensitivity occurring over time.

Automatic trimming of the microphone frequency response

Automatic microphone frequency response trimming is a generalization of microphone sensitivity trimming. For frequency trimming, it must be assumed that the spectral distribution of the sound arriving at the microphones in the frequency ranges in

10   which compensation is to be carried out is similar, and that any discrepancies are well below the microphone frequency response tolerance bands. This condition is once again satisfied for a sound source located well away in comparison to the distance between the microphones (see the distance condition, further above).

The trimming process is carried out in sub-bands of the microphone transmission

15   frequency band, and can be carried out by equalization using either appropriate analog or digital filters. In the most obvious case, this is a filter structure comprising bandpass filters connected in parallel (as shown in Figure 5) or in series, and whose gains can be controlled independently of one another. The sum frequency response of the filters for the unregulated reference microphone (Figure 5 fil_{x1}, fil_{x2}... fil_{xn}) is flat in the desired

20   transmission frequency band. The frequency response of the comparison microphone is compared to that of the reference microphone by raising or lowering (amplifying or attenuating) the filter sub-bands (fil_{y1}, fil_{y2} ... fil_{yn}). The control signals g_1, g_2, g_n required to do this are derived directly from the error signals ($g_1 \sim e_1$, $g_2 \sim e_2$ ... $g_n \sim e_n$) obtained for the individual frequency bands. A large number of bandpass filters are usually required

25   for precise trimming.

The complexity of the filter structure can be reduced considerably if those microphone parameters which are dominant in specific frequency bands, such as the configuration of the sound inlet opening, the front/back volume, the diaphragm flexibility and their electrical equivalent circuits are known, and discrepancies between microphones

30   can be traced back to changes in individual parameters. The trimming process can be carried out with comparatively little complexity by means of appropriate equalization filters, which specifically counteract these discrepancies.

Figure 6 shows the block diagram of a trimming apparatus which comprises a controllable equalization filter, weighting filters and level measurement units. The equalization filter is once again actuated via the difference signal e from the level measurement units, in which case both the amplitude and the phase frequency response are generally varied.

The advantages mentioned for sensitivity trimming also apply to automatic trimming of the microphone frequency response.

Simple control of the sensitivity of microphones with an integrated amplifier, whose operating point can be adjusted by means of external circuitry, for example a field-effect transistor preamplifier (FEET preamplifier)

Virtually all the microphone capsules used currently in telecommunications and consumer applications are electorate transducers with an integrated field-effect transistor preamplifier. These preamplifiers are used to reduce the very high microphone source impedance and to amplify the microphone signal. Generally, this represents the source circuit of a field-effect transistor. The operating point of the transistor, and hence the sensitivity of the microphone as well, can be varied by varying the supply impedance and the supply voltage. The microphone frequency response can be varied, provided not just real but also complex supply impedances are acceptable.

Figures 7 and 8 each show a circuit for sensitivity and frequency response control of electronic microphones, which does not require any external, controllable amplifiers or attenuators. An implementation provides sensitivity and frequency response control via the microphone supply voltage U_L, which, in the case of automatic sensitivity trimming or matching, can be derived directly from the difference signal between the measured sound levels or signal levels $U_L = (v \cdot e_n) + U_0$ (v in this case denotes a gain factor and U a constant voltage parameter, for example the output voltage before sensitivity and frequency matching). The control range of the microphone sensitivity by varying the microphone supply voltage is up to 25 dB, depending on the supply impedance (see Table 2).

Alternatively, it is also possible to provide sensitivity and frequency response control in such a manner that the microphone supply impedance Z_L with a control voltage U_{ST} which, in the case of automatic sensitivity and frequency response trimming and matching, can be derived directly from the difference signal between the measured sound levels and signal levels $U_{ST} \approx ((v \cdot e_n) + U_0')$ (v in this case denotes a gain factor and U_0' a

constant voltage parameter, for example the output voltage before sensitivity and frequency response matching).

The supply impedance Z_L can be controlled electronically by means of a controlled field-effect transistor for real values, and by means of a gyrator circuit for complex values. The control range of the microphone sensitivity via the supply impedance is up to 10 dB, depending on the microphone supply voltage (see Table 2).

One advantage of this type of sensitivity and frequency response control is that the circuit complexity is minimized, as well as the costs associated with it. The control range is sufficiently high for most applications.

Accordingly, to an embodiment, the present invention provides sensitivity and frequency response trimming by the separation of amplitude and phase information from the sound arriving at the microphones, which allows automatic trimming while microphones are being operated in an array. While the phase relationship is used to form the directional characteristic of an array, the amplitude relationship is available for trimming of the microphone sensitivities and of the amplitude frequency responses. Production tolerances relating to these microphone parameters can thus be compensated for, so that the desired frequency response and the directional characteristic of the overall arrangement are obtained.

According to an embodiment, the present invention provides sensitivity control of microphones having an integrated FET preamplifier by the use of the supply voltage or of the supply resistance to vary the FET operating point, and hence the gain of the FET preamplifier.

The inventive microphone trimming can be used for all multiple microphone arrangements whose directional sensitivity is obtained by using the phase relationships between the individual microphone signals. These microphone arrangements can sensibly be used wherever high-quality recording of acoustic signals is required in a noisy environment. The directional characteristic of these arrangements in this case allows acoustic noise (environmental noise, reverberation) away from the microphone major axis to be attenuated, and adjacent sound sources (other speakers) to be separated. By avoiding complex acoustic trimming, automatic microphone trimming allows considerable cost savings during production, and thus also makes it possible to use microphone arrays in consumer applications, for example in hands-free devices for communications terminals or

for equipment voice control. Further applications of microphone arrays in which the invention can sensibly be used are conference microphones.

The trimming invention has been implemented in a simple electronic circuit and has been tested using a second-order gradient microphone. Gradient microphones are formed by interconnecting two cardioid microphones, whose sensitivity is automatically trimmed by means of the circuit. The sensitivity control for the microphone to be trimmed is carried out using the principles of the present invention. Microphone trimming operates even at low environmental noise levels (room volume) and is independent of the sound incidence direction.

The sensitivity control for microphones with a built-in FET preamplifier can also advantageously be used for automatic control of microphone signal levels. These circuits are generally referred to as automatic gain control circuits. Practical applications for such circuits include all consumer equipment having a microphone recording channel (cassette recorders, dictation systems, hands-free telephones, etc.).

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

ABSTRACT

In order to record and to process audio signals with a good useful-signal to noise-signal ratio in acoustic noise conditions and with a good ratio between the direct sound and the reflected sound in an environment which in particular has no reverberation
5   electrical signals produced by conversion of audio signals recorded by a predetermined microphone arrangement are processed in such a manner that, if the sound pressure levels at the microphones in the microphone arrangement are the same, electrical signals which are produced by these microphones but are of different intensity – different sensitivities of the microphones – are automatically matched, without any manual matching procedures
10   needed to be carried out individually and separately. A microphone arrangement is based on combining the characteristics of an array of microphones with those of a method for matching the sensitivity of microphones.

In the claims:

15   On the first page of the claims, delete "Patent Claims" in line 1, and substitute therefor:

CLAIMS

The invention is claimed as follows:

Please cancel claims 1-35, without prejudice, and substitute therefor claims 36-70.

20   36.   A method for recording and processing audio signals from a sound source in an environment having acoustic noise, comprising the steps of:

(a)   arranging first and second microphones with a predetermined distance between the microphones;

(b)   arranging the first and second microphones with respect to a major axis
25   defined by the first microphone in such a manner that the second microphone is arranged at a predetermined angle to the major axis and/or at a predetermined offset distance from the major axis; and

(c)   processing first and second electrical signals respectively produced by the first and second microphones by automatically matching the first and
30   second electrical signals which have different sensitivities and/or different frequency responses.

404846/D/2 CBBX02_   13

37.   The method as claimed in claim 36 wherein the arranging steps further comprise arranging a plurality of second microphones relative to the first microphone, each second microphone producing a second electrical signal, and wherein the processing step further comprises processing the first electrical signal which each second electrical

5   signal in pairs by automatically matching respectively difference sensitivities and/or frequency responses in the electrical signals produced by the microphones.

38.   The method as claimed in claim 37, wherein when matching for difference sensitivities, further comprising the steps of:

(a)   filtering each pair of the first electrical signal and the second electrical

10   signal;

(b)   forming signal level differences from the filtered electrical signals; and

(c)   varying the respective signal levels of the unfiltered electrical signals as a function of the signal level differences until the signal level differences each essentially have a value "0".

15   39.   The method as claimed in claim 38, further comprising the steps of:

(a)   forming a sum signal and a difference signal for each pair of first and second signals from the unfiltered electrical signals;

(b)   forming a joint signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by

20   forming linear combinations and/or propagation time delays based on the delay and sum principle; and

(c)   filtering the joint signal in order to achieve a desired frequency response and a desired sensitivity.

40.   The method as claimed in claim 38, further comprising the step of filtering

25   each pair of first and second electrical signals when the major axis is arranged essentially at right angles to the sound source.

41. The method as claimed in claim 38, further comprising the step of low-pass filtering each pair of first and second electrical signals when the major axis is not arranged essentially at right angles to the sound source, and when only first and second microphones are arranged, defining a wavelength of the low-pass-filtered frequencies as

5   greater than twice the distance between the first and second microphones, and when the first microphone and the plurality of second microphones are arranged, defining a wavelength of the low-pass-filtered frequencies as greater than a sum of the distances between the individual microphones.

42. The method as claimed in claim 37, wherein when matching different

10   sensitivities, further comprising the steps of:

      (a)   measuring signal levels of both the first electrical signal and the second electrical signal for each pair of first and second electrical signals;

      (b)   forming signal level differences from the measured signal levels; and

      (c)   varying the respective signal levels of the electrical signals as a function of

15   the signal level differences until the signal level differences each essentially have a value "0".

43. The method as claimed in claim 42, further comprising the steps of:

      (a)   forming a sum signal and a difference signal for each pair of first and second electrical signals;

20   (b)   forming a joint signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on a delay and sum principle; and

      (c)   filtering the joint signal in order to achieve a desired frequency response

25   and desired sensitivity.

44. The method as claimed in claim 37, wherein when matching different frequency responses, further comprising the steps of:

(a) filtering the first electrical signal and the second electrical signal n times where n∈N;

(b) measuring signal levels of both the filtered first electrical signal and the filtered second electrical signal;

5 (c) forming signal level differences from the measured signal levels of the filtered electrical signals; and

(d) varying the respective signal levels relating to the filtering of the electrical signals as a function of the signal level differences until the signal level differences each essentially have a value "0".

10 45. The method as claimed in claim 44, wherein the first electrical signal and the second electrical signal are bandpass-filtered n times where n∈N.

46. The method as claimed in claim 44 further comprising the steps of:

(a) forming a sum signal and a difference signal for each pair of the first electrical signal or first total signal of the n-times filtered first electrical 15 signal, and a second total signal of the n-times filtered second electrical signal;

(b) forming a joint signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on the 20 delay and sum principle; and

(c) filtering the joint signal in order to achieve a desired frequency response and a desired sensitivity.

47. The method as claimed in claim 37, wherein when matching different frequency responses, further comprising the steps of:

25 (a) filtering at least one of the first electrical signal and the second electrical signal for equalization;

     (b)   filtering the first electrical signal and the second electrical signal for weighting;

     (c)   measuring signal levels of both the weighted first electrical signal and the weighted second electrical signal;

5   (d)   forming signal level differences from the measured signal levels of the weighted electrical signals; and

     (e)   varying the respective signal levels relating to the equalization filtering of the electrical signals as a function of the signal level differences until the signal level differences each essentially have a value "0".

10   48.   The method as claimed in claim 47, further comprising the steps of:

     (a)   forming a sum signal and a difference signal for each pair of first and second signals from the first electrical signal or from the equalized first electrical signal, and from the equalized second electrical signals;

     (b)   forming a joint signal from the respective sum signals and difference
15   signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on the delay and sum principle; and

     (c)   filtering the joint signal in order to achieve a desired frequency response and desired sensitivity.

20   49.   The method as claimed in claim 36, wherein the step of arranging first and second microphones further comprises arranging two directional or gradient microphones.

     50.   The method as claimed in claim 37, wherein arranging the first microphone and the plurality of second microphones comprises the step of arranging three ball microphones.

25   51.   The method as claimed in claim 36, wherein the predetermined angle is in the range of from about 0° to about 40°.

52. The method as claimed in claim 36, wherein the offset distance is less than or equal to the distance between the first and second microphones.

53. The method as claimed in claim 36, wherein the first and second microphones are arranged on an acoustic boundary surface.

5   54. A device for recording and processing audio signals from a sound source in an environment having acoustic noise, comprising:

    (a)   a microphone arrangement having at least two microphones arranged in pairs with a predetermined distance between the microphones in each a pair of microphones;

10 (b)   a first microphone and at least one second microphone of the at least two microphones being arranged with respect to a major axis, which is defined by the first microphone, in such a manner that the at least one second microphone is arranged at a predetermined angle to the major axis and/or at a predetermined offset distance from the major axis;

15 (c)   a first filter which filters a first electrical signal produced by the first microphone and a second electrical signal produced by the second microphone, the first and second signals having different sensitivities and/or frequency responses;

    (d)   means for forming signal level differences in pairs from the filtered
20   electrical signals; and

    (e)   a controller connected to the means for forming signal level differences which at least partially varies the respective signal levels of the unfiltered electrical signals as a function of the signal level differences, until the signal level differences each essentially have a value "0".

25 55. The device claimed in claim 54, further comprising:

    (a)   sum formation means which forms sum signals and difference signals in pairs from the unfiltered electrical signals;

(b)   means for forming linear combinations and/or propagation time delays which each form a joint signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic based on the delay and sum principle; and

5   (c)   a second filter which filters the joint signal in order to achieve a desired frequency response and a desired sensitivity.

56.   The device as claimed in claim 55, wherein the first filter is one of a low-pass, high-pass or bandpass filter, when the sound source is arranged essentially at right angles to the major axis.

10   57.   The device as claimed in claim 56, wherein the first filter is a low-pass filter when the sound source is not arranged essentially at right angles to the major axis and a wavelength of the low-pass-filtered frequencies with the microphone arrangement having two microphones is greater than twice the distance between the microphones, and, with the microphone arrangement having more than two microphones, is greater than the 15 sum of the distances between the individual microphones.

58.   A device for recording and processing audio signals from a sound source in an environment having acoustic noise, comprising:

(a)   a microphone arrangement having at least two microphones arranged in pairs with a predetermined distance between the microphones in each pair 20   of microphones;

(b)   a first microphone and at least one second microphone of the at least two microphones being arranged with respect to a major axis, which is defined by the first microphone, in such a manner that the at least one second microphone is arranged at a predetermined angle to the major axis and/or at 25   a predetermined offset distance from the major axis and the first microphone;

(c)   means for measuring signal levels from a first electrical signal produced by conversion by the first microphone and from a second electrical signal

produced by conversion by each second microphone, with the signals having different sensitivities;

(d) means for forming signal level differences in pairs from the measured electrical signals; and

5 (e) a controller connected to the means for forming signal level differences which at least partially varies the electrical signals as a function of the signal level differences relating to the respective signal level, until the signal level differences each essentially have a value of "0".

59. The device as claimed in claim 58, further comprising:

10 (a) a sum formation means which forms sum signals and difference signals in pairs from the electrical signals;

(b) means for forming linear combinations and/or propagation time delays which each form a joint signal from the respective sum signals and difference signals in order to achieve a higher-order directional 15 characteristic based on the delay and sum principle; and

(c) a filter which filters the joint signal in order to achieve a desired frequency response and a desired sensitivity.

60. A device for recording and processing audio signals from a sound source in an environment having acoustic noise, comprising:

20 (a) a microphone arrangement having at least two microphones arranged in pairs with a predetermined distance between the microphones in each pair of microphones;

(b) a first microphone and at least one second microphone of the at least two microphones being arranged with respect to a major axis, which is defined 25 by the first microphone, in such a manner that the second microphone is arranged at a predetermined angle to the major axis and/or at a predetermined offset distance from the major axis and the first microphone;

(c) filters which filter a first electrical signal produced by conversion by the first microphone and a second electrical signal produced by conversion by

each second microphone, with the signals having different frequency responses n times where n∈N;

(d) means for measuring signal levels of the filtered first and second signals;

(e) means for forming signal level differences in pairs from the filtered electrical signals; and

(f) a controller connected to the means for forming signal level differences which at least partially varies the respective signal levels of the filtering of the electrical signals as a function of the signal level differences until the signal level differences each essentially have a value "0".

61. The device as claimed in claim 60, wherein the filter is a bandpass filter.

62. The device as claimed in claim 61, further comprising:

(a) sum formation means which forms sum signals and difference signals in pairs from the first electrical signal or from a first total signal of the n-times filtered first electrical signal, and from a second total signal of the n-times filtered second electrical signal;

(b) means for forming linear combinations and/or propagation time delays which each form a joint signal form the respective sum signals and difference signals in order to achieve a higher-order directional characteristic based on the delay and sum principle; and

(c) a filter which filters the joint signal in order to achieve desired frequency response and a desired sensitivity.

63. A device for recording and processing audio signals from a sound source, in an environment having acoustic noise, comprising:

(a) a microphone arrangement having at least two microphones arranged in pairs with a predetermined distance between the microphones in each pair of microphones;

(b) a first microphone and at least one second microphone of the at least two microphones being arranged with respect to a major axis, which is defined by the first microphone, in such a manner that the second microphone is

arranged at a predetermined angle to the major axis and/or at a predetermined offset distance from the major axis and the first microphone;

(c)   equalization filters which filter a first electrical signal produced by conversion by the first microphone and a second electrical signal produced by conversion by each second microphone, with the signals having different frequency responses;

(d)   weighting filters which filter the first electrical signal and the second electrical signal;

(e)   means for measuring signal levels of the filtered first electrical signal and of the filtered second electrical signal;

(f)   means for forming signal level differences in pairs from the filtered electrical signals; and

(g)   a controller connected to the means for forming signal level differences which at least partially varies the respective signal levels of the equalization filtering of the electrical signals as a function of the signal level differences until the signal level differences each essentially have a value "0".

64.   The device as claimed in claim 63, further comprising:

(a)   sum formation means which forms sum signals and difference signals in pairs from the first electrical signal or from the equalized first electrical signal, and from the equalized second electrical signal;

(b)   means for forming linear combination and/or propagation time delays which each form a joint signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic based on the delay and sum principle; and

(c)   a filter which filters the joint signal in order to achieve a desired frequency response and a desired sensitivity.

65.   The device as claimed in claim 54, wherein if the microphone has an integrated amplifier having an operating point which can be adjusted by external circuitry, the controller is designed in such a manner that

(a)   sensitivity and/or the frequency response can be controlled via a microphone supply voltage which is obtained from the sum of a constant voltage and the product of a signal level difference signal and a gain factor, or

(b)   a microphone feed impedance can be adjusted via a physical control variable, which is proportional to the product of a signal level difference signal and a gain factor, supplemented by a constant variable, in such a manner that the sensitivity and/or frequency response are controllable.

66.   The device as claimed in claim 54, wherein the microphone arrangement has two directional or gradient microphones.

67.   The device as claimed in claim 54, wherein the microphone arrangement has three ball microphones.

68.   The device as claimed in claim 54, wherein the angle is in the range of from about 0° to about 40°.

69.   The device as claimed in claim 54, wherein the offset distance is less than or equal to the distance between the microphones.

70.   The device as claimed in claim 54, wherein the microphone arrangement is arranged on an acoustic boundary surface.

REMARKS

The present amendment makes editorial changes and corrects typographical errors in the specification, which includes the Abstract, in order to conform the specification to the requirements of United States Patent Practice. No new matter is added thereby. Attached hereto is a marked-up version of the changes made to the specification by the present amendment. The attached page is captioned "**Version With Markings To Show Changes Made**".
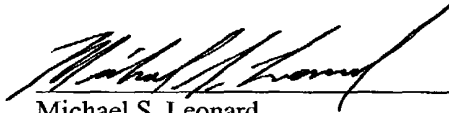
In addition, the present amendment cancels original claims 1-35 in favor of new claims 36-70. Claims 36-70 have been presented solely because the revisions by red-lining and underlining which would have been necessary in claims 1-35 in order to present

404846/D/2 CBBX02_   23

those claims in accordance with preferred United States Patent Practice would have been too extensive, and thus would have been too burdensome. The present amendment is intended for clarification purposes only and not for substantial reasons related to patentability pursuant to 35 USC §§103, 102, 103 or 112. Indeed, the cancellation of

5 claims 1-35 does not constitute an intent on the part of the Applicants to surrender any of the subject matter of claims 1-35.

Early consideration on the merits is respectfully requested.

Respectfully submitted,

10

_____ (Reg. No. 37,557)
Michael S. Leonard
Bell, Boyd & Lloyd LLC
P.O. Box 1135

15 Chicago, Illinois 60690-1135
(312) 807-4270
Attorneys for Applicants

<u>VERSIONS WITH MARKINGS TO SHOW CHANGES MADE</u>

<u>In The Specification:</u>

The Specification of the present application, including the Abstract, has been amended as follows:

5

<u>SPECIFICATION</u>

<u>TITLE OF THE INVENTION</u>

<u>METHOD AND DEVICE FOR RECORDING AND PROCESSING</u>

<u>AUDIO SIGNALS IN AN ENVIRONMENT FILLED WITH ACOUSTIC NOISE</u>

<u>BACKGROUND OF THE INVENTION</u>

10 ~~Description~~

~~Method and device for recording and processing audio signals in an environment filled with acoustic noise~~

Previous methods and devices for recording and processing audio signals (for

15 example speech and/or sound signals) in an environment filled with acoustic noise are based either on the use of a first-order directional microphone (gradient microphones) or on a microphone array having two or more individual microphones (for example ball microphones). In the latter case, additional digital filters are used to match the frequency responses of the microphones.

20 Both directional microphones and microphone arrays are covered by the generic term free-field microphones, whose directivity allows the useful sound and the acoustic noise to be separated, and whose output signals are added using the "delay and sum principle".

Microphone arrays are arrangements of a number of microphones positioned

25 physically separately, whose signals are processed such that the sensitivity of the overall arrangement is directional. The directivity results from the propagation time differences (phase relationships) with which a sound signal arrives at the various microphones in the array. Examples of this are so-called gradient microphones or microphone arrays which operate on the delay and sum beam-former principle. A problem that arises in the

30 practical implementation of microphone arrays is the scatter, resulting from production tolerances, in the sensitivity and frequency response of the individual microphones used. The sensitivity in this case means the characteristic of a microphone to produce an electrical signal from a predetermined sound pressure level. The frequency response

represents the way in which the sensitivity of the microphone varies with frequency. The tolerance band stated by the microphone manufacturers is typically between ± 2 and ± 4 dB. If these microphone characteristics differ within a microphone array, then this has a negative influence on the frequency response and the directional characteristic of the

5 overall arrangement. As a rule, the frequency response has increased ripple, while the directivity is considerably reduced. In this context, Table 1 shows the reduction in the directivity index of a second-order gradient microphone (microphone array comprising two individual cardioid microphones) when the two individual microphones have different sensitivities. The directivity index in this case indicates the suppression of diffused

10 incident sound compared to useful sound from the microphone major axis.

Until now, the sensitivity and the frequency response of the individual microphones in an array have had to be determined by acoustic measurement and have had to be matched to one another by suitable electrical amplifiers and filters. The measurement includes the stimulation of the microphone to be measured using a sound

15 reference signal produced via a loudspeaker, and the recording of the electrical signals produced by the microphones. The gain factors and filter parameters required for matching are then calculated from the microphone signals, and set as appropriate.

The acoustic measurement of the microphone parameters involves considerable technical complexity and results in corresponding costs for the production of microphone

20 arrays. Furthermore, the trimming process is carried out during the production of the microphone array, so that it is applicable only to this one operating situation. Other operating situations, for example different supply voltages or aging effects of the microphones, are ignored.

A gradient microphone system is known from US-5,463,694, which is based on the

25 idea that microphones essentially have the same frequency response and the same sensitivity. The term "sensitivity" means the characteristic of a microphone to produce a predetermined electrical signal from a predetermined sound pressure level.

SUMMARY OF THE INVENTION

~~The object on which~~ An advantage of the present invention ~~is based~~ is to record

30 and to process audio signals with a good useful-signal to noise-signal ratio in acoustic noise conditions and with a good ratio between the direct sound and the reflected sound in an environment which in particular has no reverberation.

This object is achieved by the features of patent claims 1 and 19.

The idea on which According to the invention, is based there is the processing of electrical signals produced by conversion of audio signals recorded by a predetermined microphone arrangement in such a manner that, if the sound pressure levels at the microphones in the microphone arrangement are the same, electrical signals which are produced by these microphones but are of different intensity - different sensitivities of the microphones - are automatically matched, that is to say, without any manual matching procedures needing to be carried out individually and separately.

The invention is, in this case based on the idea of, pertains to combining the characteristics of an array of microphones with those of a method for matching the sensitivity of microphones.

The advantages Advantages of this procedure are, firstly, involve simple implementation in conjunction with the (optimum) result achieved in the process and, secondly, the a good relationship between the complexity of the microphone arrangement (arrays) and the result.

The result which can be achieved using the present invention is considerably better than the result which can be achieved by using US Patent 5,463,694. This is shown in the following table:

The table shows the relationship between the "difference between the sensitivity of the microphones (delta)" and the "directivity index"

Delta (dB)	Directivity index (dB)
- 0	8.7 -
1	8.4
- 2	8.1 -
3	7.8
- 4	7.5 -
5	7.2
- 6	6.9

Summary: The greater the difference between the sensitivity of the microphones, the poorer is the directivity index.

The method and the device of the invention allow an optimum directivity index to be achieved for the microphone arrangement for any environment filled with acoustic noise, since it always automatically matches the sensitivity of the microphones.

One parameter for assessing a directional microphone is the directivity index. ~~Expressed in clear terms, this~~ The directivity index means the extent to which diffuse (omnidirectional) incident sound is suppressed in comparison to useful sound from the major axis. In this case, the directivity index is a logarithmic variable, and is therefore 5 expressed in decibels.

~~Advantageous developments of the invention are specified in the dependent claims.~~

The ~~proposed solution~~ present invention preferably comprises an array of microphones and filters in order to match the sensitivity of the microphones and to achieve the desired array frequency response.

10 In comparison to known microphone arrays, which require complicated digital filters in order to match the frequency responses of the microphones, the ~~proposed~~ inventive method and ~~the proposed~~ device require only the sensitivity to be matched. Furthermore, this can be achieved either by a simple digital filter, or by an analog circuit.

With the ~~proposed~~ inventive array, in which two simple directional microphones 15 are used ~~in the simplest case~~, directivity indexes are achieved which cannot be achieved with a single directional microphone. An array of ball microphones can achieve this result, but only by using more than two microphones to form the array. Furthermore, preferably, a filter is required for each microphone in order to match the frequency responses of the various microphones.

20 In order to match the sensitivity of the microphones, the microphones should be stimulated using a sound preferably source which is arranged at right angles to the axis of the microphones, in order to calculate the sensitivity correction. However, this is not always feasible in practice.

Alternatively, it is also possible to match the sensitivity independently of the 25 position of the sound source, ~~However, this is only feasible~~ for example, when the sound source has only low-frequency components whose wavelengths are much longer than the distance between the microphones. In a microphone arrangement having two microphones, the wavelength should, for example, be greater than twice the distance between the microphones, while the wavelength for a microphone arrangement having 30 more than two microphones should be greater than the sum of the distances between the individual microphones.

Furthermore, the microphones are preferably positioned in pairs such that their major axes lie on a common axis. However, deviations from this are also possible with regard to a tilt or adjustment angle, which can vary, for example, in the range between 0° and 40°, and with respect to an offset distance which, for example, is less than or equal to

5   the distance between the microphones. In all these different situations, there is preferably always one reference microphone with a reference major axis with respect to which each of the other microphones in the microphone arrangement is arranged at an adjustment angle to the major axis and at an offset distance from it.

The signals from the microphones are processed, for example, by a block in order

10   to match the sensitivity of the microphones. The sum and the difference are then formed from the two signals, and combined to form a linear combination in order to obtain a signal with a higher-order directional characteristic than that of the two microphones in the array.

~~Finally, the~~ The signal is then processed using a filter in order to achieve the

15   desired array frequency response and sensitivity.

Furthermore, it is advantageous if the microphone arrangement is a second-order gradient microphone (quadrupole microphone) arranged ~~formed with boundary surface~~ (on an "acoustic boundary surface"~~;~~ since this improves the ratio between the signal and the self-noise. ~~(~~In acoustics, an "acoustic boundary surface" is a hard surface, for example a

20   table in a room, a window pane or the roof in a car etc.~~)~~ In this case, the ratio between the useful signal and the environmental noise is furthermore increased when sound is recorded in situations with high environmental noise, for example in vehicles or in public spaces. The subjective comprehensibility of recorded speech is thus improved in an environment with reverberation, for example in spaces with highly reflective walls (car, telephone

25   cubicle, church, etc.).

The quadrupole microphone consists of a combination of two first-order gradient microphones with a cardioid characteristic, whose output signals are subtracted from one another. This measure increases the directivity index from 4.8 to 10 dB. The directivity index in this case indicates the gain with which the useful signal incident on the

30   microphone major axis is amplified in comparison to the diffuse incident noise signal. Suitable arrangement of the individual microphones in the quadrupole microphone on a boundary surface improves the useful signal sensitivity of the microphone by a further 6

dB, and significantly improves the useful signal to self-noise ratio of higher-order gradient microphones, which is in principle low in the lower frequency range.

A ~~major feature~~ significant advantage of the ~~proposed solution~~ present invention is that the complexity involved in achieving improved useful signals is small in comparison to that of previous solutions. At the same time, the external dimensions of the boundary surface quadrupole microphone are less than with known arrangements of comparable directivity. The proposed arrangement avoids interference between the incident direct sound and the sound which is reflected by the boundary surface and can interfere with the directivity of a microphone close to a boundary surface.

The boundary-surface construction of the gradient microphone raises the microphone useful signal incident on the major axis by 6 dB with respect to the microphone self-noise.

Higher-order gradient microphones constructed with a boundary surface can be used sensibly wherever high-quality recording of acoustic signals is required in a noisy environment. In addition to high noise signal suppression, the high directivity of the microphone also achieves considerable suppression of reverberation in rooms, so that this considerably improves the capability to understand speech, even in quiet rooms. Examples for the use of the proposed invention include hands-free devices for telephones and automatic voice recognition systems, as well as conference microphones.

Additional features and advantages of the present invention are described in, and will be apparent from, the Detailed Description of the Preferred Embodiments and the Drawings.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1 is a schematic diagram of a microphone array according to the present invention.

Figure 2 is a schematic diagram of another microphone array according to the present invention.

Figure 3 is a schematic diagram of an automatic microphone sensitivity trimming for n microphones in an array.

Figure 4 is a schematic diagram of an automatic microphone sensitivity trimming for two microphones, with the signal levels of both microphones being regulated.

Figure 5 is a schematic diagram showing a trimming process according to the present invention.

Figure 6 is a schematic diagram of a trimming apparatus according to the present invention.

5   Figure 7 is a circuit diagram for sensitivity and frequency response control of microphones according to the invention.

Figure 8 is another circuit diagram for sensitivity and frequency response control of microphones according to the present invention.

10   DETAILED DESCRIPTION OF THE INVENTION

~~Exemplary embodiments of the invention will be explained with reference to Figures 1 to 8.~~

The way in which the sensitivity trimming is carried out is shown in Figures 1 and 2. If the two microphones have approximately the same frequency response, sensitivity
15   trimming in a restricted frequency range is sufficient to achieve the desired directivity over the entire transmission band. In practical situations, the condition of "equal frequency response" is satisfied to a good approximation.

The filter illustrated in Figure 2 may advantageously be in the form of a low-pass filter with a cut-off frequency of, for example, 100 Hz.

20   The possible applications for a second-order gradient microphone include all situations where good speech transmission is required in noisy surroundings. For example, this may be a microphone for a hands-free system in a car, or the microphone for a voice recognition system operating in the hands-free mode.

Automatic trimming of microphone sensitivity

25   The ~~proposed solution to~~ present invention can address the problem of microphone sensitivity trimming ~~is based on~~ by automatic trimming of the microphone signal levels during operation of the microphones in an array. In this case, the existing environmental noise level or useful signal level is sufficient. The microphone signal levels and amplitudes recorded by the microphones are measured and are matched to one another
30   independently of their respective phases. In this case, it must be assumed that the sound pressure levels arriving at the microphones are virtually the same, or that the discrepancies are considerably less than the microphone sensitivity tolerance. This condition is satisfied

when the distance between the sound source which dominates the sound level and the microphone array is considerably greater than the distance between the microphones to be trimmed, and no pronounced space modes occur. The signal levels can be measured by any type of envelope curve measurement or by real root-mean-square value measurement. The time constant for this measurement must in this case be longer than the maximum signal propagation time between the microphones to be trimmed. The sensitivity trimming can be carried out by amplification or attenuation in the opposite sense to the discrepancy between the signal levels.

Figure 3 shows the block diagram of the automatic microphone sensitivity trimming for n microphones in an array. Microphone 1 is in this case the reference microphone, to whose microphone signal level the levels of the other microphones 2 to n are matched. The circuit diagram is composed of blocks whose gain or attenuation is controllable and units for signal level measurement. The measured signal levels are used to produce difference or error signals e_n, which are used as the control variable for the variable amplifiers or attenuators. Overall, there are n-1 regulators, whose reference variable is the signal level of the reference microphone. In order to satisfy the distance condition mentioned in the previous paragraph, adjacent microphones can also be trimmed in pairs (not shown in Figure 3).

Figure 4 shows the block diagram of the automatic microphone sensitivity trimming for two microphones, with the signal levels of both microphones being regulated. The advantage of this ~~solution~~ embodiment over ~~a solution~~ an embodiment with an unregulated reference microphone as shown in Figure 3 is that there is less variance between the output levels, since it is possible to use the mean sensitivity of the microphones for regulation.

The automatic microphone trimming proposed here can be implemented easily in terms of circuitry and requires no further trimming steps, such as complex acoustic trimming. This results in clear cost advantages even for small microphone array quantities. Furthermore, the method allows continuous trimming, so that it is also possible to take account of changes in the microphone sensitivity occurring over time.

Automatic trimming of the microphone frequency response

Automatic microphone frequency response trimming is a generalization of microphone sensitivity trimming. For frequency trimming, it must be assumed that the

spectral distribution of the sound arriving at the microphones in the frequency ranges in which compensation is to be carried out is similar, and that any discrepancies are well below the microphone frequency response tolerance bands. This condition is once again satisfied for a sound source located well away in comparison to the distance between the

5   microphones (see the distance condition, further above).

The trimming process is carried out in sub-bands of the microphone transmission frequency band, and can be carried out by equalization using either appropriate analog or digital filters. In the most obvious case, this is a filter structure comprising bandpass filters connected in parallel (as shown in Figure 5) or in series, and whose gains can be

10   controlled independently of one another. The sum frequency response of the filters for the unregulated reference microphone (Figure 5 fil_{x1}, fil_{x2}... fil_{xn}) is flat in the desired transmission frequency band. The frequency response of the comparison microphone is compared to that of the reference microphone by raising or lowering (amplifying or attenuating) the filter sub-bands (fil_{y1}, fil_{y2} ... fil_{yn}). The control signals g_1, g_2, g_n required

15   to do this are derived directly from the error signals ($g_1 \sim e_1$, $g_2 \sim e_2$ ... $g_n \sim e_n$) obtained for the individual frequency bands. A large number of bandpass filters are usually required for precise trimming.

The complexity of the filter structure can be reduced considerably if those microphone parameters which are dominant in specific frequency bands, such as the

20   configuration of the sound inlet opening, the front/back volume, the diaphragm flexibility and their electrical equivalent circuits are known, and discrepancies between microphones can be traced back to changes in individual parameters. The trimming process can be carried out with comparatively little complexity by means of appropriate equalization filters, which specifically counteract these discrepancies.

25   Figure 6 shows the block diagram of a trimming apparatus which comprises a controllable equalization filter, weighting filters and level measurement units. The equalization filter is once again actuated via the difference signal e from the level measurement units, in which case both the amplitude and the phase frequency response are generally varied.

30   The advantages mentioned for sensitivity trimming also apply to automatic trimming of the microphone frequency response.

404846/D/2 CBBX02_   33

5 Virtually all the microphone capsules used currently in telecommunications and consumer applications are electret transducers with an integrated field-effect transistor preamplifier. These preamplifiers are used to reduce the very high microphone source impedance and to amplify the microphone signal. Generally, this represents the source circuit of a field-effect transistor. The operating point of the transistor, and hence the

10 sensitivity of the microphone as well, can be varied by varying the supply impedance and the supply voltage. The microphone frequency response can be varied, provided not just real but also complex supply impedances are acceptable.

 Figures 7 and 8 each show the a circuit for simple sensitivity and frequency response control of electret electronic microphones, which does not require any external,

15 controllable amplifiers or attenuators. The simplest An implementation is for provides sensitivity and frequency response control via the microphone supply voltage U_L, which, in the case of automatic sensitivity trimming or matching, can be derived directly from the difference signal between the measured sound levels or signal levels $U_L = (v \cdot e_n) + U_0$ (v in this case denotes a gain factor and U a constant voltage parameter, for example the output

20 voltage before sensitivity and frequency matching). The control range of the microphone sensitivity by varying the microphone supply voltage is up to 25 dB, depending on the supply impedance (see Table 2).

 Alternatively, it is also possible to provide sensitivity and frequency response control in such a manner that the microphone supply impedance Z_L [lacuna] with a control

25 voltage U_{ST} which, in the case of automatic sensitivity and frequency response trimming and matching, can be derived directly from the difference signal between the measured sound levels and signal levels $U_{ST} \approx ((v \cdot e_n) + U_0')$ (v in this case denotes a gain factor and U_0' a constant voltage parameter, for example the output voltage before sensitivity and frequency response matching).

30 The supply impedance Z_L can be controlled electronically by means of a controlled field-effect transistor for real values, and by means of a gyrator circuit for complex values. The control range of the microphone sensitivity via the supply impedance is up to 10 dB, depending on the microphone supply voltage (see Table 2).

The One advantage of this type of sensitivity and frequency response control is that the circuit complexity is minimized, as well as the costs associated with it. The control range is sufficiently high for most applications.

The inventive step for Accordingly, to an embodiment, the present invention
5   provides sensitivity and frequency response trimming is by the separation of amplitude and phase information from the sound arriving at the microphones, which allows automatic trimming while microphones are being operated in an array. While the phase relationship is used to form the directional characteristic of an array, the amplitude relationship is available for trimming of the microphone sensitivities and of the amplitude
10   frequency responses. Production tolerances relating to these microphone parameters can thus be compensated for, so that the desired frequency response and the directional characteristic of the overall arrangement are obtained.

The inventive step for According to an embodiment, the present invention provides sensitivity control of microphones having an integrated FET preamplifier is by the use of
15   the supply voltage or of the supply resistance to vary the FET operating point, and hence the gain of the FET preamplifier.

The proposed inventive microphone trimming principle can be used for all multiple microphone arrangements whose directional sensitivity is obtained by using the phase relationships between the individual microphone signals. These microphone arrangements
20   can sensibly be used wherever high-quality recording of acoustic signals is required in a noisy environment. The directional characteristic of these arrangements in this case allows acoustic noise (environmental noise, reverberation) away from the microphone major axis to be attenuated, and adjacent sound sources (other speakers) to be separated. By avoiding complex acoustic trimming, automatic microphone trimming allows
25   considerable cost savings during production, and thus also makes it possible to use microphone arrays in consumer applications, for example in hands-free devices for communications terminals or for equipment voice control. Further applications of microphone arrays in which the invention can sensibly be used are conference microphones.

30   The trimming principle invention has already been implemented in a simple electronic circuit, and its suitability has been tested using a second-order gradient microphone. Gradient microphones are formed by interconnecting two cardioid

microphones, whose sensitivity is automatically trimmed by means of the circuit. The sensitivity control for the microphone to be trimmed is carried out using the principles ~~principle described in Section 3.3~~ of the present invention. Microphone trimming operates even at low environmental noise levels (room volume) and is independent of the sound

5   incidence direction.

The sensitivity control for microphones with a built-in FET preamplifier can also advantageously be used for automatic control of microphone signal levels. These circuits are generally referred to as automatic gain control circuits. Practical applications for such circuits include all consumer equipment having a microphone recording channel (cassette

10   recorders, dictation systems, ~~(~~hands-free telephones, etc.~~)~~.

Although the present invention has been described with reference to specific embodiments, those of skill in the art will recognize that changes may be made thereto without departing from the spirit and scope of the invention as set forth in the hereafter appended claims.

Abstract

Method and device for recording and processing audio signals in an environment filled with acoustic noise

5   In order to record and to process audio signals with a good useful-signal to noise-signal ratio in acoustic noise conditions and with a good ratio between the direct sound and the reflected sound in an environment which in particular has no reverberation electrical signals produced by conversion of audio signals recorded by a predetermined microphone arrangement are processed in such a manner that, if the sound pressure levels

10   at the microphones in the microphone arrangement are the same, electrical signals which are produced by these microphones but are of different intensity – different sensitivities of the microphones – are automatically matched, that is to say without any manual matching procedures needinged to be carried out individually and separately. The inventionA microphone arrangement is in this case based on the idea of combining the characteristics

15   of an array of microphones with those of a method for matching the sensitivity of microphones.

Figure 2

Description

Method and device for recording and processing audio
signals in an environment filled with acoustic noise

5

Previous methods and devices for recording and
processing audio signals (for example speech and/or
sound signals) in an environment filled with acoustic
noise are based either on the use of a first-order
10   directional microphone (gradient microphones) or on a
microphone array having two or more individual
microphones (for example ball microphones). In the
latter case, additional digital filters are used to
match the frequency responses of the microphones.

15

Both directional microphones and microphone arrays are
covered by the generic term free-field microphones,
whose directivity allows the useful sound and the
acoustic noise to be separated, and whose output
20   signals are added using the "delay and sum principle".

Microphone arrays are arrangements of a number of
microphones positioned physically separately, whose
signals are processed such that the sensitivity of the
25   overall arrangement is directional. The directivity
results from the propagation time differences (phase
relationships) with which a sound signal arrives at the
various microphones in the array. Examples of this are
so-called gradient microphones or microphone arrays
30   which operate on the delay and sum beam-former
principle. A problem that arises in the practical
implementation of microphone arrays is the scatter,
resulting from production tolerances, in the
sensitivity and frequency response of the individual
35   microphones used. The sensitivity in this case/means
the characteristic of a microphone to produce an
electrical signal from a predetermined sound pressure

GR 99 P 2377 P Foreign Version

- 1a -

level. The frequency response represents the way in which the sensitivity of the microphone varies with frequency. The tolerance band stated by the microphone manufacturers is typically between ± 2 and ± 4 dB. If

5   these microphone characteristics differ within a microphone

array, then this has a negative influence on the frequency response and the directional characteristic of the overall arrangement. As a rule, the frequency response has increased ripple, while the directivity is considerably reduced. In this context, Table 1 shows the reduction in the directivity index of a second-order gradient microphone (microphone array comprising two individual cardioid microphones) when the two individual microphones have different sensitivities. The directivity index in this case indicates the suppression of diffused incident sound compared to useful sound from the microphone major axis.

Until now, the sensitivity and the frequency response of the individual microphones in an array have had to be determined by acoustic measurement and have had to be matched to one another by suitable electrical amplifiers and filters. The measurement includes the stimulation of the microphone to be measured using a sound reference signal produced via a loudspeaker, and the recording of the electrical signals produced by the microphones. The gain factors and filter parameters required for matching are then calculated from the microphone signals, and set as appropriate.

The acoustic measurement of the microphone parameters involves considerable technical complexity and results in corresponding costs for the production of microphone arrays. Furthermore, the trimming process is carried out during the production of the microphone array, so that it is applicable only to this one operating situation. Other operating situations, for example different supply voltages or aging effects of the microphones, are ignored.

- 2a -

A gradient microphone system is known from US-5,463,694, which is based on the idea that microphones essentially have the same frequency response and the same sensitivity. The term 5 "sensitivity" means the characteristic of a microphone to

produce a predetermined electrical signal from a predetermined sound pressure level.

The object on which the invention is based is to record and to process audio signals with a good useful-signal to noise-signal ratio in acoustic noise conditions and with a good ratio between the direct sound and the reflected sound in an environment which in particular has no reverberation.

This object is achieved by the features of patent claims 1 and 19.

The idea on which the invention is based is the processing of electrical signals produced by conversion of audio signals recorded by a predetermined microphone arrangement in such a manner that, if the sound pressure levels at the microphones in the microphone arrangement are the same, electrical signals which are produced by these microphones but are of different intensity - different sensitivities of the microphones - are automatically matched, that is to say without any manual matching procedures needing to be carried out individually and separately.

The invention is in this case based on the idea of combining the characteristics of an array of microphones with those of a method for matching the sensitivity of microphones.

The advantages of this procedure are, firstly, simple implementation in conjunction with the (optimum) result achieved in the process and, secondly, the good relationship between the complexity of the microphone arrangement (arrays) and the result.

GR 99 P 2377 P

- 3a -

The result which can be achieved using the invention is considerably better than the result which can be achieved by using US Patent

5,463,694. This is shown in the following table:

The table shows the relationship between the "difference between the sensitivity of the microphones
5   (delta)" and the "directivity index"

Delta (dB)	Directivity index (dB)
0	8.7
1	8.4
2	8.1
3	7.8
4	7.5
5	7.2
6	6.9

Summary: The greater the difference between the sensitivity of the microphones, the poorer is the
10   directivity index.

The method and the device allow an optimum directivity index to be achieved for the microphone arrangement for any environment filled with acoustic noise, since it
15   always automatically matches the sensitivity of the microphones.

One parameter for assessing a directional microphone is the directivity index. Expressed in clear terms, this
20   means the extent to which diffuse (omnidirectional) incident sound is suppressed in comparison to useful sound from the major axis. In this case, the directivity index is a logarithmic variable, and is therefore expressed in decibels.
25

Advantageous developments of the invention are specified in the dependent claims.

GR 99 P 2377 P

4a

- 4a -

The proposed solution preferably comprises an array of microphones and filters in order to match the sensitivity of the microphones and to achieve the desired array frequency response.

GR 99 P 2377 P

- 5 -

In comparison to known microphone arrays, which require complicated digital filters in order to match the frequency responses of the microphones, the proposed method and the proposed device require only the
5   sensitivity to be matched. Furthermore, this can be achieved either by a simple digital filter, or by an analog circuit.

With the proposed array, in which two simple
10 directional microphones are used in the simplest case, directivity indexes are achieved which cannot be achieved with a single directional microphone. An array of ball microphones can achieve this result, but only by using more than two microphones to form the array.
15 Furthermore, preferably, a filter is required for each microphone in order to match the frequency responses of the various microphones.

In order to match the sensitivity of the microphones,
20 the microphones should be stimulated using a sound source which is arranged at right angles to the axis of the microphones, in order to calculate the sensitivity correction. However, this is not always feasible in practice.
25

Alternatively, it is also possible to match the sensitivity independently of the position of the sound source. However, this is only feasible when the sound source has only low-frequency components whose
30 wavelengths are much longer than the distance between the microphones. In a microphone arrangement having two microphones, the wavelength should, for example, be greater than twice the distance between the microphones, while the wavelength for a microphone
35 arrangement having more than two microphones should be greater than the sum of the distances between the individual microphones.

GR 99 P 2377 P

- 5a -

Furthermore, the microphones are preferably positioned
in pairs such that their major axes lie on a common
axis. However, deviations from this are also

possible with regard to a tilt or adjustment angle,
which can vary, for example, in the range between 0°
and 40°, and with respect to an offset distance which,
for example, is less than or equal to the distance
5   between the microphones. In all these different
situations, there is preferably always one reference
microphone with a reference major axis with respect to
which each of the other microphones in the microphone
arrangement is arranged at an adjustment angle to the
10 major axis and at an offset distance from it.

The signals from the microphones are processed, for
example, by a block in order to match the sensitivity
of the microphones. The sum and the difference are then
15 formed from the two signals, and combined to form a
linear combination in order to obtain a signal with a
higher-order directional characteristic than that of
the two microphones in the array.

20 Finally, the signal is processed using a filter in
order to achieve the desired array frequency response
and sensitivity.

Furthermore, it is advantageous if the microphone
25 arrangement is a second-order gradient microphone
(quadrupole microphone) formed with boundary surface
(on an "acoustic boundary surface"; in acoustics, an
"acoustic boundary surface" is a hard surface, for
example a table in a room, a window pane or the roof in
30 a car etc.) since this improves the ratio between the
signal and the self-noise. In this case, the ratio
between the useful signal and the environmental noise
is furthermore increased when sound is recorded in
situations with high environmental noise, for example
35 in vehicles or in public spaces. The subjective
comprehensibility of recorded speech is thus improved

- 6a -

in an environment with reverberation, for example in spaces with highly reflective walls (car, telephone cubicle, church).

5   The quadrupole microphone consists of a combination of two first-order gradient microphones with a cardioid

GR 99 P 2377 P

characteristic, whose output signals are subtracted from one another. This measure increases the directivity index from 4.8 to 10 dB. The directivity index in this case indicates the gain with which the

5 useful signal incident on the microphone major axis is amplified in comparison to the diffuse incident noise signal. Suitable arrangement of the individual microphones in the quadrupole microphone on a boundary surface improves the useful signal sensitivity of the

10 microphone by a further 6 dB, and significantly improves the useful signal to self-noise ratio of higher-order gradient microphones, which is in principle low in the lower frequency range.

15 A major feature of the proposed solution is that the complexity involved in achieving improved useful signals is small in comparison to that of previous solutions. At the same time, the external dimensions of the boundary surface quadrupole microphone are less

20 than with known arrangements of comparable directivity. The proposed arrangement avoids interference between the incident direct sound and the sound which is reflected by the boundary surface and can interfere with the directivity of a microphone close to a

25 boundary surface.

The boundary-surface construction of the gradient microphone raises the microphone useful signal incident on the major axis by 6 dB with respect to the

30 microphone self-noise.

Higher-order gradient microphones constructed with a boundary surface can be used sensibly wherever high-quality recording of acoustic signals is required in a

35 noisy environment. In addition to high noise signal suppression, the high directivity of the microphone also achieves considerable suppression of reverberation

in rooms, so that this considerably improves the capability to understand speech, even in quiet rooms. Examples for the use of the proposed invention include hands-free devices for telephones and automatic voice

5   recognition systems, as well as conference microphones.

GR 99 P 2377 P

- 8 -

Exemplary embodiments of the invention will be
explained with reference to Figures 1 to 8.

5   The way in which the sensitivity trimming is carried
out is shown in Figures 1 and 2. If the two microphones
have approximately the same frequency response,
sensitivity trimming in a restricted frequency range is
sufficient to achieve the desired directivity over the
entire transmission band. In practical situations, the
10 condition of "equal frequency response" is satisfied to
a good approximation.

The filter illustrated in Figure 2 may advantageously
be in the form of a low-pass filter with a cut-off
15 frequency of, for example, 100 Hz.

The possible applications for a second-order gradient
microphone include all situations where good speech
transmission is required in noisy surroundings. For
20 example, this may be a microphone for a hands-free
system in a car, or the microphone for a voice
recognition system operating in the hands-free mode.

Automatic trimming of microphone sensitivity

25

The proposed solution to the problem of microphone
sensitivity trimming is based on automatic trimming of
the microphone signal levels during operation of the
microphones in an array. In this case, the existing
30 environmental noise level or useful signal level is
sufficient. The microphone signal levels and amplitudes
recorded by the microphones are measured and are
matched to one another independently of their
respective phases. In this case, it must be assumed
35 that the sound pressure levels arriving at the
microphones are virtually the same, or that the

GR 99 P 2377 P

- 8a -

discrepancies are considerably less than the microphone sensitivity tolerance. This condition is satisfied when the

distance between the sound source which dominates the
sound level and the microphone array is considerably
greater than the distance between the microphones to be
trimmed, and no pronounced space modes occur. The
5   signal levels can be measured by any type of envelope
curve measurement or by real root-mean-square value
measurement. The time constant for this measurement
must in this case be longer than the maximum signal
propagation time between the microphones to be trimmed.
10 The sensitivity trimming can be carried out by
amplification or attenuation in the opposite sense to
the discrepancy between the signal levels.

Figure 3 shows the block diagram of the automatic
15 microphone sensitivity trimming for n microphones in an
array. Microphone 1 is in this case the reference
microphone, to whose microphone signal level the levels
of the other microphones 2 to n are matched. The
circuit diagram is composed of blocks whose gain or
20 attenuation is controllable and units for signal level
measurement. The measured signal levels are used to
produce difference or error signals e_n, which are used
as the control variable for the variable amplifiers or
attenuators. Overall, there are n-1 regulators, whose
25 reference variable is the signal level of the reference
microphone. In order to satisfy the distance condition
mentioned in the previous paragraph, adjacent
microphones can also be trimmed in pairs (not shown in
Figure 3).
30

Figure 4 shows the block diagram of the automatic
microphone sensitivity trimming for two microphones,
with the signal levels of both microphones being
regulated. The advantage of this solution over a
35 solution with an unregulated reference microphone as
shown in Figure 3 is that there is less variance

GR 99 P 2377 P

- 9a -

between the output levels, since it is possible to use
the mean sensitivity of the microphones for regulation.

The automatic microphone trimming proposed here can be
5   implemented easily in terms of circuitry and requires
no further trimming steps, such as complex

- 10 -

acoustic trimming. This results in clear cost advantages even for small microphone array quantities. Furthermore, the method allows continuous trimming, so that it is also possible to take account of changes in 5 the microphone sensitivity occurring over time.

Automatic trimming of the microphone frequency response

Automatic microphone frequency response trimming is a 10 generalization of microphone sensitivity trimming. For frequency trimming, it must be assumed that the spectral distribution of the sound arriving at the microphones in the frequency ranges in which compensation is to be carried out is similar, and that 15 any discrepancies are well below the microphone frequency response tolerance bands. This condition is once again satisfied for a sound source located well away in comparison to the distance between the microphones (see the distance condition, further 20 above).

The trimming process is carried out in sub-bands of the microphone transmission frequency band, and can be carried out by equalization using either appropriate 25 analog or digital filters. In the most obvious case, this is a filter structure comprising bandpass filters connected in parallel (as shown in Figure 5) or in series, and whose gains can be controlled independently of one another. The sum frequency response of the 30 filters for the unregulated reference microphone (Figure 5 fil_{x1}, fil_{x2}... fil_{xn}) is flat in the desired transmission frequency band. The frequency response of the comparison microphone is compared to that of the reference microphone by raising or lowering (amplifying or 35 attenuating) the filter sub-bands (fil_{y1}, fil_{y2} ... fil_{yn}). The control signals g_1, g_2, g_n required to do this are derived directly from the error signals ($g_1 \sim e_1$, $g_2 \sim$

- 10a -

$e_2 \ldots g_n \sim e_n$) obtained for the individual frequency bands. A large numbr of bandpass filters are usually required for precise trimming.

The complexity of the filter structure can be reduced considerably if those microphone parameters which are dominant in specific frequency bands, such as the configuration of the sound inlet opening, the
5   front/back volume, the diaphragm flexibility and their electrical equivalent circuits are known, and discrepancies between microphones can be traced back to changes in individual parameters. The trimming process can be carried out with comparatively little complexity
10 by means of appropriate equalization filters, which specifically counteract these discrepancies.

Figure 6 shows the block diagram of a trimming apparatus which comprises a controllable equalization
15 filter, weighting filters and level measurement units. The equalization filter is once again actuated via the difference signal e from the level measurement units, in which case both the amplitude and the phase frequency response are generally varied.
20

The advantages mentioned for sensitivity trimming also apply to automatic trimming of the microphone frequency response.

25 <u>Simple control of the sensitivity of microphones with an integrated amplifier, whose operating point can be adjusted by means of external circuitry, for example a field-effect transistor preamplifier (FET preamplifier)</u>

30 Virtually all the microphone capsules used currently in telecommunications and consumer applications are electret transducers with an integrated field-effect transistor preamplifier. These preamplifiers are used to reduce the very high microphone source impedance and
35 to amplify the microphone signal. Generally, this represents the source circuit of a field-effect transistor. The operating point of the transistor, and

GR 99 P 2377 P

- 11a -

hence the sensitivity of the microphone as well, can be varied by varying the supply impedance and the supply voltage. The microphone frequency response can

be varied, provided not just real but also complex
supply impedances are acceptable.

Figures 7 and 8 each show the circuit for simple
5   sensitivity and frequency response control of electret
microphones, which does not require any external,
controllable amplifiers or attenuators. The simplest
implementation is for sensitivity and frequency
response control via the microphone supply voltage U_L,
10   which, in the case of automatic sensitivity trimming or
matching, can be derived directly from the difference
signal between the measured sound levels or signal
levels $U_L = (v \cdot e_n) + U_0$ (v in this case denotes a gain
factor and U a constant voltage parameter, for example
15   the output voltage before sensitivity and frequency
matching). The control range of the microphone
sensitivity by varying the microphone supply voltage is
up to 25 dB, depending on the supply impedance (see
Table 2).
20

Alternatively, it is also possible to provide
sensitivity and frequency response control in such a
manner that the microphone supply impedance Z_L [lacuna]
with a control voltage U_{ST} which, in the case of
25   automatic sensitivity and frequency response trimming
and matching, can be derived directly from the
difference signal between the measured sound levels and
signal levels $U_{ST} \approx ((v \cdot e_n) + U_0')$ (v in this case denotes a
gain factor and U_0' a constant voltage parameter, for
30   example the output voltage before sensitivity and
frequency response matching).

The supply impedance Z_L can be controlled
electronically by means of a controlled field-effect
35   transistor for real values, and by means of a gyrator
circuit for complex values. The control range of the
microphone sensitivity via the supply impedance is up

GR 99 P 2377 P

- 12a -

to 10 dB, depending on the microphone supply voltage (see Table 2).

The advantage of this type of sensitivity and frequency
5 response control is that the circuit complexity is minimized,

- 13 -

as well as the costs associated with it. The control
range is sufficiently high for most applications.

The inventive step for sensitivity and frequency
5   response trimming is the separation of amplitude and
phase information from the sound arriving at the
microphones, which allows automatic trimming while
microphones are being operated in an array. While the
phase relationship is used to form the directional
10 characteristic of an array, the amplitude relationship
is available for trimming of the microphone
sensitivities and of the amplitude frequency responses.
Production tolerances relating to these microphone
parameters can thus be compensated for, so that the
15 desired frequency response and the directional
characteristic of the overall arrangement are obtained.

The inventive step for sensitivity control of
microphones having an integrated FET preamplifier is
20 the use of the supply voltage or of the supply
resistance to vary the FET operating point, and hence
the gain of the FET preamplifier.

The proposed microphone trimming principle can be used
25 for all multiple microphone arrangements whose
directional sensitivity is obtained by using the phase
relationships between the individual microphone
signals. These microphone arrangements can sensibly be
used wherever high-quality recording of acoustic
30 signals is required in a noisy environment. The
directional characteristic of these arrangements in
this case allows acoustic noise (environmental noise,
reverberation) away from the microphone major axis to
be attenuated, and adjacent sound sources (other
35 speakers) to be separated. By avoiding complex acoustic
trimming, automatic microphone trimming allows
considerable cost savings during production, and thus

GR 99 P 2377 P

- 13a -

also makes it possible to use microphone arrays in
consumer applications, for example in hands-free

- 14 -

devices for communications terminals or for equipment voice control. Further applications of microphone arrays in which the invention can sensibly be used are conference microphones.

5

The trimming principle has already been implemented in a simple electronic circuit, and its suitability has been tested using a second-order gradient microphone. Gradient microphones are formed by interconnecting two

10 cardioid microphones, whose sensitivity is automatically trimmed by means of the circuit. The sensitivity control for the microphone to be trimmed is carried out using the principle described in Section 3.3. Microphone trimming operates even at low

15 environmental noise levels (room volume) and is independent of the sound incidence direction.

The sensitivity control for microphones with a built-in FET preamplifier can also advantageously be used for

20 automatic control of microphone signal levels. These circuits are generally referred to as automatic gain control circuits. Practical applications for such circuits include all consumer equipment having a microphone recording channel (cassette recorders,

25 dictation systems, (hands-free) telephones).

Patent Claims

1. A method for recording and processing audio signals in an environment filled with acoustic noise, having the following features:

    (a) at least two microphones are arranged in pairs with a predetermined distance between the microphones, forming a microphone arrangement with respect to a sound source located in the environment filled with acoustic noise,

    (b) the microphones, a first microphone and at least one second microphone, are arranged with respect to a major axis, which is defined by the first microphone, in such a manner that the second microphone is arranged at a predetermined tilt or adjustment angle to the major axis and/or at a predetermined offset distance from the major axis and the first microphone,

    (c) electrical signals produced by the microphones by conversion from the recorded audio signals are processed in such a manner that, if the sound pressure levels at the microphones are the same, electrical signals which are produced by these microphones but are of different intensity - different sensitivities and/or different frequency responses of the microphones - are automatically matched.

2. The method as claimed in claim 1, characterized in that,

    if the first microphone produces a first electrical signal and every second microphone each produces a second electrical signal, the first electrical signal and the second electrical signal, or the second electrical signals, are processed in pairs in such a manner that the respectively different sensitivities and/or frequency responses in the electrical signals produced by the microphones are automatically matched.

GR 99 P 2377 P

- 15a -

3.   The method as claimed in claim 2, characterized in
      that, when matching for different sensitivities,

(a) the first electrical signal and the second electrical signal are filtered,

(b) signal level differences are formed from the filtered electrical signals,

(c) the respective signal levels of the unfiltered electrical signals are at least partially varied as a function of the signal level differences, until the signal level differences each essentially assume the value "0".

4. The method as claimed in claim 3, characterized in that

(a) sum signals and difference signals are in each case formed in pairs from the unfiltered electrical signals,

(b) a joint useful signal is in each case formed from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on the "delay and sum principle", and

(c) the useful signal is filtered in order to achieve the desired frequency response and the desired sensitivity.

5. The method as claimed in claim 3 or 4, characterized in that
the first electrical signal and the second electrical signal are filtered as required, for example low-pass, high-pass or bandpass filtered, when the sound source is arranged essentially at right angles to the major axis.

6. The method as claimed in claim 3 or 4, characterized in that
the first electrical signal and the second electrical signal are low-pass filtered when the

GR 99 P 2377 P

- 16a -

sound source is not arranged essentially at right
angles to the major axis and the wavelength of the
low-pass-filtered frequencies with the microphone
arrangement having two microphones is greater than
5   twice the distance between the microphones, and,
with the microphone arrangement having more than

two microphones, is greater than the sum of the distances between the individual microphones.

7. The method as claimed in claim 2, characterized in that, when matching different sensitivities,

(a) the signal levels of both the first electrical signal and the second electrical signal are measured,

(b) signal level differences are formed from the measured signal levels of the electrical signals, and

(c) the respective signal levels of the electrical signals are at least partially varied as a function of the signal level differences, until the signal level differences each essentially assume the value "0".

8. The method as claimed in claim 7, characterized in that

(a) sum signals and difference signals are in each case formed in pairs from the electrical signals,

(b) a joint useful signal is in each case formed from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on the "delay and sum principle", and

(c) the useful signal is filtered in order to achieve the desired frequency response and the desired sensitivity.

9. The method as claimed in claim 2, 7 or 8, characterized in that, when matching different frequency responses,

GR 99 P 2377 P

(a)   the first electrical signal and the second
electrical signal are filtered n times where n∈N,

(b)   the signal levels of both the filtered first
electrical   signal   and   the   filtered   second
electrical signal are measured,

(c)   signal level differences are formed from the
measured signal levels of the filtered electrical
signals, and

(d) the respective signal levels relating to the filtering of the electrical signals are at least partially varied as a function of the signal level differences until the signal level differences each essentially assume the value "0".

10. The method as claimed in claim 9, characterized in that the first electrical signal and the second electrical signal are bandpass-filtered n times where n∈N.

11. The method as claimed in claim 9 or 10, characterized in that

(a) sum signals and difference signals are in each formed in pairs from the first electrical signal or from a first total signal of the n-times filtered first electrical signal, and from a second total signal of the n-times filtered second electrical signal,

(b) a joint useful signal is in each case formed from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on the "delay and sum principle", and

(c) the useful signal is filtered in order to achieve the desired frequency response and the desired sensitivity.

12. The method as claimed in claim 2, 7 or 8, characterized in that, when matching different frequency responses,

(a) the first electrical signal and/or the second electrical signal are/is filtered for equalization,

(b) the first electrical signal and the second electrical signal are filtered for weighting,

- 18a -

(c) the signal levels of both the weighted first electrical signal and the weighted second electrical signal are measured,

(d) signal level differences are formed from the measured signal levels of the weighted electrical signals, and

(e) the respective signal levels relating to the equalization filtering of the electrical signals are at least partially varied as a function of the signal level differences until the signal level differences each essentially assume the value "0".

13. The method as claimed in claim 12, characterized in that

(a) sum signals and difference signals are in each case formed in pairs from the first electrical signal or from the equalized first electrical signal, and from the equalized second electrical signals,

(b) a joint useful signal is in each case formed from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic by forming linear combinations and/or propagation time delays based on the "delay and sum principle", and

(c) the useful signal is filtered in order to achieve the desired frequency response and the desired sensitivity.

14. The method as claimed in one of claims 1 to 13, characterized in that
the microphone arrangement is formed from two directional or gradient microphones.

15. The method as claimed in one of claims 1 to 13, characterized in that
the microphone arrangement is formed from three ball microphones.

GR 99 P 2377 P

- 19a -

16. The method as claimed in one of claims 1 to 15, characterized in that

the tilt or adjustment angle is predetermined in such a manner that the tilt or adjustment angle is

5   in the range between 0° and 40°.

17. The method as claimed in one of claims 1 to 16, characterized in that
the offset distance is predetermined in such a manner that the offset distance is less than or equal to the distance between the microphones.

18. The method as claimed in one of claims 1 to 17, characterized in that
the microphone arrangement is arranged on an "acoustic boundary surface".

19. A device for recording and processing audio signals in an environment filled with acoustic noise, having the following features:
(a) at least two microphones are arranged in pairs with a predetermined distance between the microphones, forming a microphone arrangement with respect to a sound source located in the environment filled with acoustic noise,
(b) the microphones, a first microphone and at least one second microphone, are arranged with respect to a major axis, which is defined by the first microphone, in such a manner that the second microphone is arranged at a predetermined tilt or adjustment angle to the major axis and/or at a predetermined offset distance from the major axis and the first microphone,
(c) first filters filter a first electrical signal produced by conversion by the first microphone and a second electrical signal produced by conversion by each second microphone, with the signals having different sensitivities and/or frequency responses,
(d) means for forming signal level differences produce signal level differences in pairs from the filtered electrical signals, and

GR 99 P 2377 P

- 20a -

(e) control means are connected to the means for forming signal level differences and are designed in such a manner that the respective signal levels of the unfiltered electrical signals are at least

5   partially varied as a function of the signal level differences, until the

signal level differences each essentially assume the value "0".

20. The device as claimed in claim 19, characterized in that

(a) sum formation means are provided, which in each case form sum signals and difference signals in pairs from the unfiltered electrical signals,

(b) the means for forming linear combinations and/or propagation time delays are provided, which each form a joint useful signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic based on the "delay and sum principle", and

(c) a second filter is provided, which filters the useful signal in order to achieve the desired frequency response and the desired sensitivity.

21. The device as claimed in claim 19 or 20, characterized in that the first filter is a low-pass, high-pass or bandpass filter, when the sound source is arranged essentially at right angles to the major axis.

22. The device as claimed in claim 21, characterized in that the first filter is a low-pass filter when the sound source is not arranged essentially at right angles to the major axis and the wavelength of the low-pass-filtered frequencies with the microphone arrangement having two microphones is greater than twice the distance between the microphones, and, with the microphone arrangement having more than two microphones, is greater than the sum of the distances between the individual microphones.

GR 99 P 2377 P

- 21a -

23. A device for recording and processing audio
    signals in an environment filled with acoustic
    noise, having the following features:

GR 99 P 2377 P

(a) at least two microphones are arranged in pairs with a predetermined distance between the microphones, forming a microphone arrangement with respect to a sound source located in the
5 environment filled with acoustic noise,

(b) the microphones, a first microphone and at least one second microphone, are arranged with respect to a major axis, which is defined by the first microphone, in such a manner that the second
10 microphone is arranged at a predetermined tilt or adjustment angle to the major axis and/or at a predetermined offset distance from the major axis and the first microphone,

(c) means for measuring signal levels measure
15 signal levels from a first electrical signal produced by conversion by the first microphone and from a second electrical signal produced by conversion by each second microphone, with the signals having different sensitivities,

20 (d) means for forming signal level differences produce signal level differences in pairs from the measured electrical signals, and

(e) control means are connected to the means for forming signal level differences and are designed
25 in such a manner that the electrical signal are at least partially varied as a function of the signal level differences relating to the respective signal level, until the signal level differences each essentially assume the value "0".

30

24. The device as claimed in claim 23, characterized in that

(a) sum formation means are provided, which in each case form sum signals and difference signals
35 in pairs from the electrical signals,

(b) the means for forming linear combinations and/or propagation time delays are provided, which

each form a joint useful signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic based on the "delay and sum principle", and

(c) a filter is provided, which filters the useful signal in order to achieve the desired frequency response and the desired sensitivity.

5 25. A device for recording and processing audio signals in an environment filled with acoustic noise, having the following features:

(a) at least two microphones are arranged in pairs with a predetermined distance between the

10 microphones, forming a microphone arrangement with respect to a sound source located in the environment filled with acoustic noise,

(b) the microphones, a first microphone and at least one second microphone, are arranged with

15 respect to a major axis, which is defined by the first microphone, in such a manner that the second microphone is arranged at a predetermined tilt or adjustment angle to the major axis and/or at a predetermined offset distance from the major axis

20 and the first microphone,

(c) filters filter a first electrical signal produced by conversion by the first microphone and a second electrical signal produced by conversion by each second microphone, with the signal having

25 different frequency responses n times where n∈N,

(d) means for measuring signal levels measure signal levels of the filtered first electrical signal and of the filtered [lacuna],

(d) means for forming signal level differences

30 produce signal level differences in pairs from the filtered electrical signals, and

(f) control means are connected to the means for forming signal level differences and are designed in such a manner that the respective signal levels

35 of the filtering of the electrical signals are at least partially varied as a function of the signal

GR 99 P 2377 P

- 23a -

level differences until the signal level differences each essentially assume the value "0".

GR 99 P 2377 P

26.   The device as claimed in claim 25, characterized
      in that
      the filter is a bandpass filter.

5   27.   The device as claimed in claim 25 or 26,
            characterized in that
            (a) sum formation means are provided, which in
            each case form sum signals and difference signals
            in pairs from the first electrical signal or from
10   a first total signal of the n-times filtered first
            electrical signal, and from a second total signal
            of the n-times filtered second electrical signal,
            (b) the means for forming linear combinations
            and/or propagation time delays are provided, which
15   each form a joint useful signal from the
            respective sum signals and difference signals in
            order to achieve a higher-order directional
            characteristic based on the "delay and sum
            principle", and
20   (c) a filter is provided, which filters the
            useful signal in order to achieve the desired
            frequency response and the desired sensitivity.

      28.   A device for recording and processing audio
25   signals in an environment filled with acoustic
            noise, having the following features:
            (a) at least two microphones are arranged in
            pairs with a predetermined distance between the
            microphones, forming a microphone arrangement with
30   respect to a sound source located in the
            environment filled with acoustic noise,
            (b) the microphones, a first microphone and at
            least one second microphone, are arranged with
            respect to a major axis, which is defined by the
35   first microphone, in such a manner that the second
            microphone is arranged at a predetermined tilt or

- 24a -

adjustment angle to the major axis and/or at a predetermined offset distance from the major axis and the first microphone,

(c) equalization filters filter a first electrical signal produced by conversion by the first microphone and a

5

- 25 -

second electrical signal produced by conversion by each second microscope, with the signals having different frequency responses,

(d) weighting filters filter the first electrical signal and the second electrical signal,

(e) means for measuring signal levels measure the signal levels of the filtered first electrical signal and of the filtered second electrical signal,

(f) means for forming signal level differences produce signal level differences in pairs from the filtered electrical signals, and

(g) control means are connected to the means for forming signal level differences and are designed in such a manner that the respective signal levels of the equalization filtering of the electrical signals are at least partially varied as a function of the signal level differences until the signal level differences each essentially assume the value "0".

29. The device as claimed in claim 28, characterized in that

(a) sum formation means are provided, which in each case form sum signals and difference signals in pairs from the first electrical signal or from the equalized first electrical signal, and from the equalized second electrical signal.

(b) the means for forming linear combinations and/or propagation time delays are provided, which in each case form a joint useful signal from the respective sum signals and difference signals in order to achieve a higher-order directional characteristic based on the "delay and sum principle", and

GR 99 P 2377 P

- 25a -

(c) a filter is provided, which filters the
useful signal in order to achieve the desired
frequency response and the desired sensitivity.

5 30. The device as claimed in one of claims 19 to 29,
characterized in that, if the microphone is in

the form of a microphone with an integrated amplifier whose operating point can be adjusted by means of external circuitry, the control means are designed in such a manner that

5   (a) the sensitivity and/or the frequency response can be controlled via a microphone supply voltage which is obtained from the sum of a constant voltage and the product of a signal level difference signal and a gain factor, or

10   (b) a microphone feed impedance can be adjusted via a physical control variable, which is proportional to the product of a signal level difference signal and a gain factor, supplemented by a constant variable, in such a manner that the

15   sensitivity and/or the frequency response are controllable.

31.   The device as claimed in one of claims 19 to 30, characterized in that

20   the microphone arrangement has two directional or gradient microphones.

32.   The device as claimed in one of claims 19 to 30, characterized in that

25   the microphone arrangement has three ball microphones.

33.   The device as claimed in one of claims 19 to 32, characterized in that

30   the tilt or adjustment angle is predetermined in such a manner that the tilt or adjustment angle is in the range between 0° and 40°.

34.   The device as claimed in one of claims 19 to 33,

35   characterized in that
the offset distance is predetermined in such a

manner that the offset distance is less than or equal to the distance between the microphones.

35. The device as claimed in one of claims 19 to 34, characterized in that
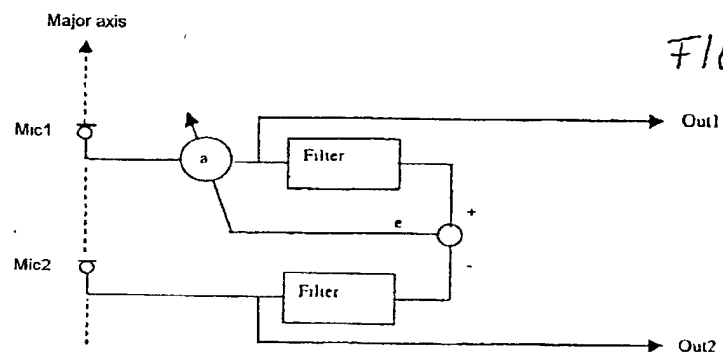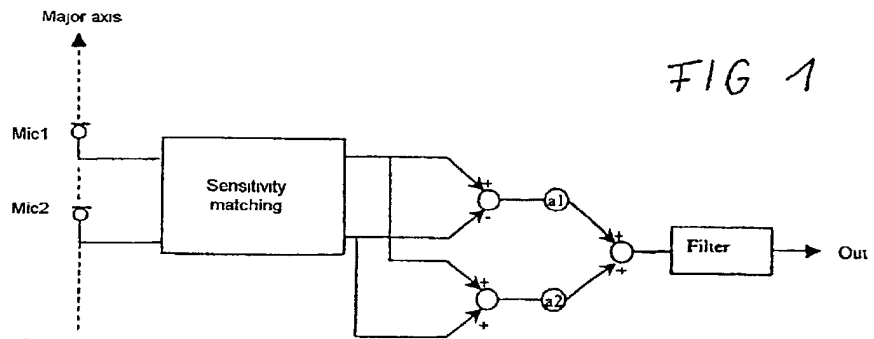the microphone arrangement is arranged on an acoustic boundary surface.

GR 99 P 2377 P

Abstract

Method and device for recording and processing audio
signals in an environment filled with acoustic noise

In order to record and to process audio signals with a
good useful-signal to noise-signal ratio in acoustic
noise conditions and with a good ratio between the
direct sound and the reflected sound in an environment
which in particular has no reverberation electrical
signals produced by conversion of audio signals
recorded by a predetermined microphone arrangement are
processed in such a manner that, if the sound pressure
·levels at the microphones in the microphone arrangement
are the same, electrical signals which are produced by
these microphones but are of different intensity –
different sensitivities of the microphones – are
automatically matched, that is to say without any
manual matching procedures needing to be carried out
individually and separately. The invention is in this
case based on the idea of combining the characteristics
of an array of microphones with those of a method for
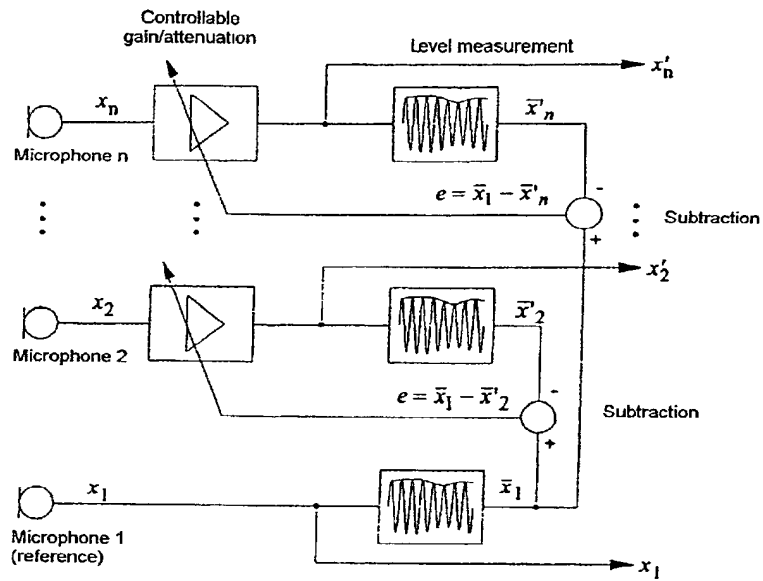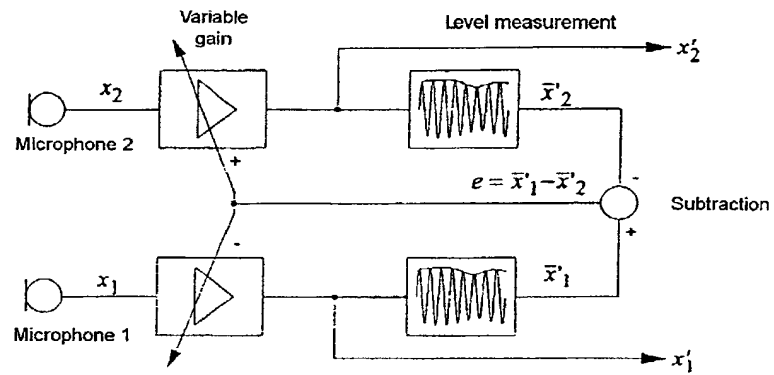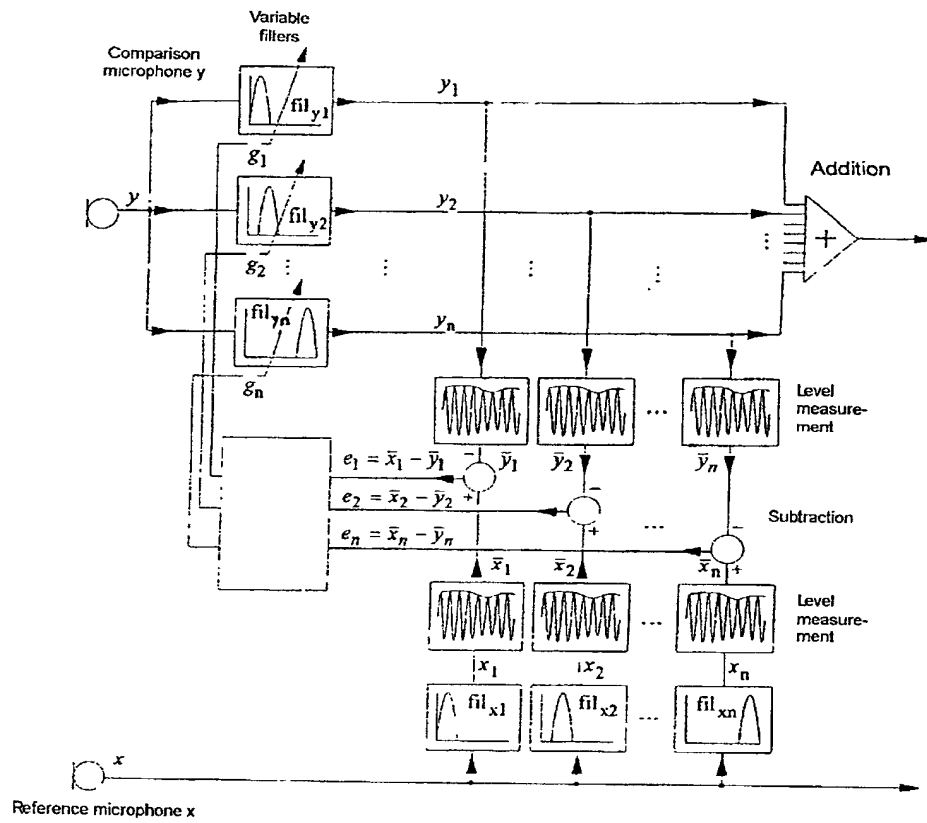matching the sensitivity of microphones.

Figure 2

Major axis

FIG 1

Major axis

FIG 2

FIG. 3
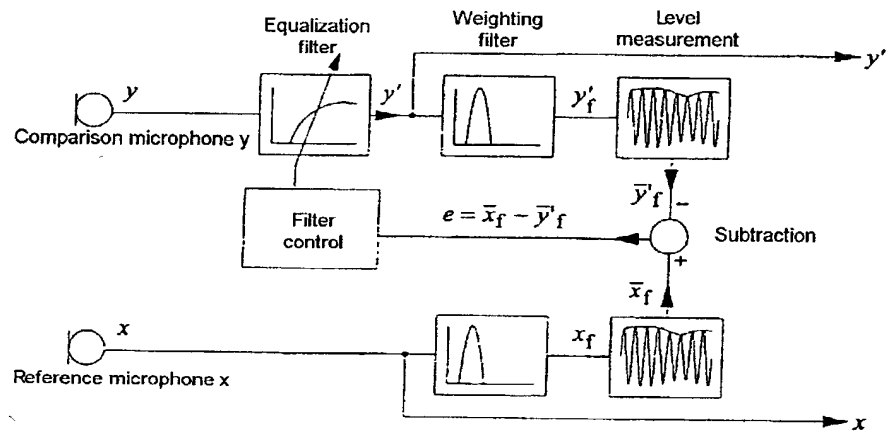
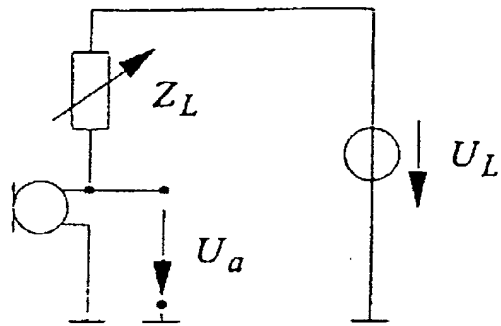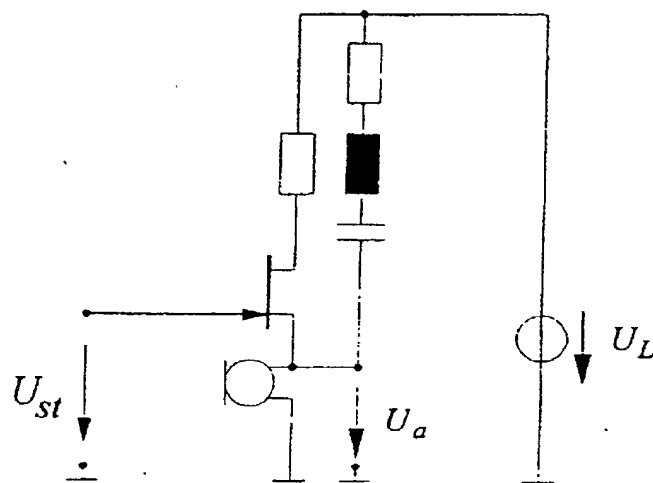$$e = \bar{x}'_1 - \bar{x}'_2$$

FIG. 4

FIG. 5

FIG. 6

$$F_{IG}. \ 7$$

FIG. 8

Declaration and Power of Attorney For Patent Application
Erklärung Für Patentanmeldungen Mit Vollmacht
German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:	As a below named inventor, I hereby declare that:
dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,	My residence, post office address and citizenship are as stated below next to my name,
dass ich, nach bestem Wissen der ursprungliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:	I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Verfahren und Einrichtung zum Aufnehmen und Bearbeiten von Audiosignalen in einer stoerschallerfuellten Umgebung

Method and device for receiving and treating audiosignals in surroundings affected by noise

deren Beschreibung	the specification of which
(zutreffendes ankreuzen) ☐ hier beigefügt ist. ☒ am _20.03.2000_ als PCT internationale Anmeldung PCT Anmeldungsnummer _____ PCT/DE00/00859_ eingereicht wurde und am _____ abgeandert wurde (falls tatsächlich abgeändert).	(check one) ☐ is attached hereto. ☒ was filed on _20.03.2000_ as PCT international application PCT Application No. _____ PCT/DE00/00859_ and was amended on _____ (if applicable)
Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.	I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.
Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.	I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).
Ich beanspruche hiermit auslandische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.	I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

IDNR: 2590 / V: 99-1.00 / B:Val

Form PTO-FB-240 (8-83)   Patent and Trademark Office-U.S. DEPARTMENT OF COMMERCE

Prior foreign appplications
Priorität beansprucht

Priority Claimed

19912525.2	DE	19.03.1999	☒	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

19934724.7	DE	23.07.1999	☒	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

			☐	☐
(Number)	(Country)	(Day Month Year Filed)	Yes	No
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)	Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivil-prozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmel-dungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozeßordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occured between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/00859	20.03.2000	anhängig	pending
(Application Serial No.)	(Filing Date D, M, Y)	(Status)	(Status)
(Anmeldeseriennummer)	(Anmeldedatum T, M, J)	(patentiert, anhängig, aufgegeben)	(patented, pending, abandoned)

(Application Serial No.)	(Filing Date D,M,Y)	(Status)	(Status)
(Anmeldeseriennummer)	(Anmeldedatum T, M; J)	(patentiert, anhängig, aufgeben)	(patented, pending, abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegen-den Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklä-rung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden koennen, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gül-tigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: *(Name und Registrationsnummer anführen)*	POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*
Customer No.	And I hereby appoint
Telefongespräche bitte richten an: *(Name und Telefonnummer)*	Direct Telephone Calls to: *(name and telephone number)* Ext. _____

Postanschrift: Send Correspondence to:

Bell, Boyd & Lloyd LLC
Three First National Plaza, 70 West Madison Street, Suite 3300 60602-4207 Chicago, Illinois
Telephone: (001) 312 372 11 21 and Facsimile (001) 312 372 20 98
or
Customer No.

Voller Name des einzigen oder ursprünglichen Erfinders:	Full name of sole or first inventor:
Dr. ROLAND AUBAUER	Dr. ROLAND AUBAUER
Unterschrift des Erfinders — Datum — 24.09.01	Inventor's signature — Date — 24.09.01
Wohnsitz	Residence
BOCHOLT, DEUTSCHLAND	BOCHOLT, GERMANY
Staatsangehörigkeit	Citizenship
DE ÖSTERREICHISCH	DE ÖSTERREICHISCH
Postanschrift	Post Office Address
MUSSUMER KIRCHWEG 174	MUSSUMER KIRCHWEG 174
46395 BOCHOLT	46395 BOCHOLT

Voller Name des zweiten Miterfinders (falls zutreffend):	Full name of second joint inventor, if any:
RALF KERN	RALF KERN
Unterschrift des Erfinders — Datum — 24.09.01	Second Inventor's signature — Date — 24.9.01
Wohnsitz	Residence
BOCHOLT, DEUTSCHLAND	BOCHOLT, GERMANY
Staatsangehörigkeit	Citizenship
DE	DE
Postanschrift	Post Office Address
HILDEGARDISSTR. 1	HILDEGARDISSTR. 1
46399 BOCHOLT	46399 BOCHOLT

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).	*(Supply similar information and signature for third and subsequent joint inventors).*

Page 3

Form PTO-FB-240 (8-83) Patent and Trademark Office-U.S. Department of COMMERCE

Voller Name des dritten Miterfinders:	Full name of third joint inventor:
Dr. STEFANO AMBROSIUS KLINKE	Dr. STEFANO AMBROSIUS KLINKE 3W
Unterschrift des Erfinders Datum	Inventor's signature Date
X Stef___ A. Kli-ke 25.X9.01	Stef___ A. Kli-ke 25.09.01
Wohnsitz	Residence
DUSSELDORF, DEUTSCHLAND	DUSSELDORF, GERMANY AEV
Staatsangehörigkeit	Citizenship
DE	DE
Postanschrift	Post Office Address
HANS-VILZ-WEG 23	HANS-VILZ-WEG 23
40489 DUSSELDORF	40489 DUSSELDORF

Voller Name des vierten Miterfinders:	Full name of fourth joint inventor:
Dr. DIETER LECKSCHAT	Dr. DIETER LECKSCHAT 4-W
Unterschrift des Erfinders Datum	Inventor's signature Date
X D. Leckschat 1.X10.01	D. Leckschat 1.10.01
Wohnsitz	Residence
BOCHOLT, DEUTSCHLAND	BOCHOLT, GERMANY DEV
Staatsangehörigkeit	Citizenship
DE	DE
Postanschrift	Post Office Address
DEGENER STR. 16	DEGENER STR. 16
46397 BOCHOLT	46397 BOCHOLT

Voller Name des fünften Miterfinders:	Full name of fifth joint inventor:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

Voller Name des sechsten Miterfinders:	Full name of sixth joint inventor:
Unterschrift des Erfinders Datum	Inventor's signature Date
Wohnsitz	Residence
Staatsangehörigkeit	Citizenship
Postanschrift	Post Office Address

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Form PTO-FB-240 (8-83)

Patent and Trademark Office-U S. DEPARTMENT OF COMMERCE